

# ICON9000

## Space becomes three-dimensional

The only modular cooking system that makes optimal use of space thanks to its **extreme modularity**: it combines with the traditional side-by-side horizontally accompanied modules new multifunctional elements above and below the cooking top, thus making **the kitchen environment less cramped and more productive**.

In electric models, **Cooking-Pro System** ensures quicker speed in the temperature rise, large cooking uniformity, improved energy efficiency, and a greater power performance thanks to the special cooking plate featuring heating elements incorporated in an **innovative multilayered material**.

The cast iron griddles with **nanotechnological surface treatment**, which promotes the sliding of cooking fats, make cleaning easier and ensure perfect cooking results. Griddle, tiles and burner are easily and completely removable and dishwasher safe.

**ICON 9000 is endowed with the innovative system Chef Comfort-Pro, which creates an invisible barrier between chef and cooking area.**

Chef Comfort-Pro reduces the heat coming from the kitchen thus creating a more comfortable environment. At the same time, it effectively directs cooking fumes and smells towards the hood so that the hood aspirating is optimized and the environment does not overheat, with a consequent reduction of energy consumption.

Functional and streamlined **MADE IN ITALY** design: maximum attention to the ergonomics, materials and finishes. **Hygienic profile CSQA Certified**. Fumes stack and full-length rear splashback and pressed surfaces. **Easy-Wash function (FT)**.

The correct functioning of the "top" elements is assured only if they are positioned on solutions from this catalogue. Their use on other working surfaces or structures can compromise their correct functioning.

Modules have an AISI 304 stainless steel surface, **thickness 2 mm (...N...);** for extreme toughness, also **3 mm steel top available (...T... see section Icon9000 Plus).**

Many elements of ICON 9000 range are placed as standard on a **AISI 304 stainless steel oven, gas or electric, static or ventilated (with double fan);** the oven has 3x2/1 GN capacity with stainless steel demountable guides which can be positioned on 3 levels.

Different possible installations through suitable accessories: freestanding on feet, on support surfaces, on wheels, on bridge configuration, with stainless steel plinths, on cantilever beam and on multi-module support frame, with or without equipped columns.



# ICON9000

## HOW TO COMPOSE YOUR ICON

### COOKING-PRO System



Energy saving




Incredibly easy to clean and hygienic



Uniform cooking



Increased productivity

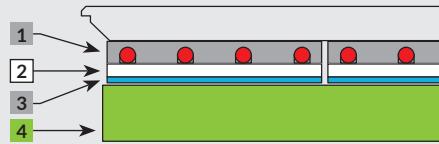Multi-layer material used in **electric griddle** and **bratt pans**

By electric models, **Cooking-Pro System** ensures quicker speed of the temperature rise, large cooking uniformity, improved energy efficiency, more power performance thanks to the special cooking plate featuring heating elements incorporated in an innovative multilayered material.

1. Heating elements incorporated in aluminum
2. Ceramic fiber insulation
3. AISI 441 stainless steel
4. Mineral wool insulation

### Open Burners



ONOFAA




1N0FAD • 1N1FADG • 1N1FADGV




1N0FA • 1N1FAG • 1N1FAGV



1N0FAA • 1N1FAAG • 1N1FAAGV • 1N1FAAE • 1N1FAAEV



1N0FAB




2N0FA • 2N1FAGV



2N1FAGF



2N0FAA • 2N1FAAGV

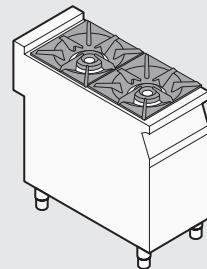

\* For 3 mm top thickness, replace letter N of the commercial reference with letter T (see section Icon9000 Plus).


### Solid Top Boiling Table



ONOTPG




1N0TPG • 1N1TPGV



ONOTPE




1N0TPE • 1N1TPEEV

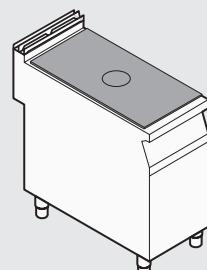


\* For 3 mm top thickness, replace letter N of the commercial reference with letter T (see section Icon9000 Plus).

### Pyroceram Cooking Elements




ON0VT1I



1N0VT1I



ON0VT2I




1N0VT2I




ON0VT1W



ON0VTR



1N0VTR


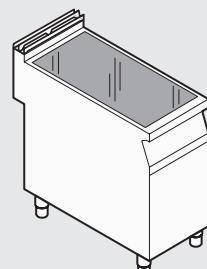


\* For 3 mm top thickness, replace letter N of the commercial reference with letter T (see section Icon9000 Plus).

# ICON9000



## HOW TO COMPOSE YOUR ICON

### Griddles - COOKING-PRO

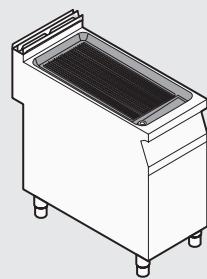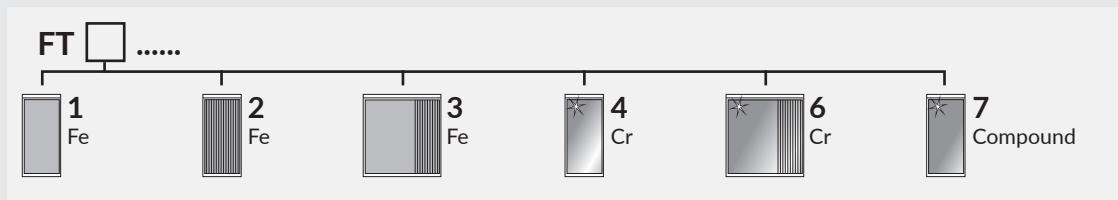


### Pasta Cooker - Baskets

Single baskets

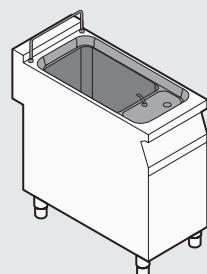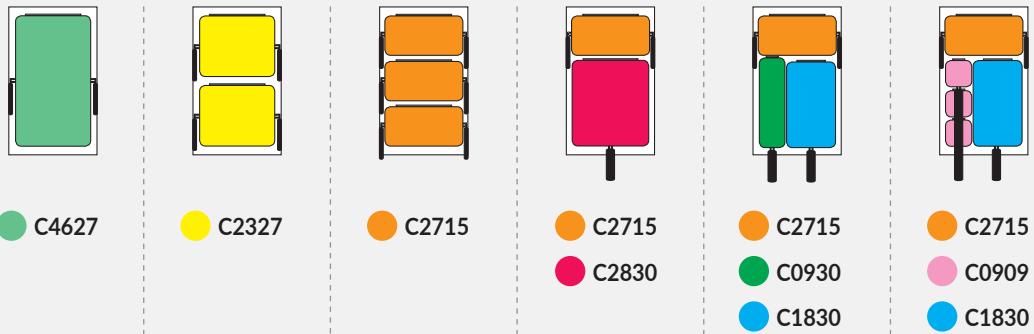

### Baskets Set

KCP40




C2715    C0930

KSCP








KSCP6



### Baskets set for automatic lift

### Bain-Marie



1/1 GN



2/3 GN



1/2 GN



1/3 GN






1/6 GN

TRA16    TRA12    TRA11

# ICON9000

## HOW TO COMPOSE YOUR ICON

### Fryers

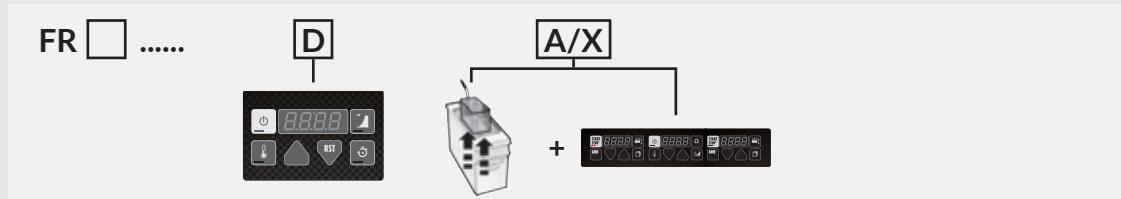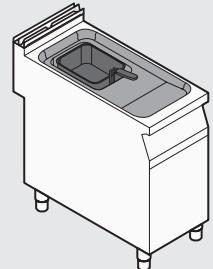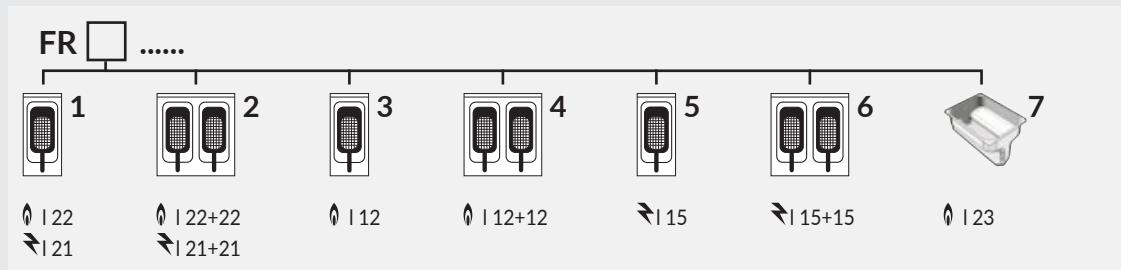

1 well model	2 wells models	Fryer baskets	
ON1FR3G ON1FR3GD I 12	1N1FR4G 1N1FR4GD I 12+12	KCFR12	CFR91214
ON1FR5E ON1FR5ED I 15	1N1FR6E 1N1FR6ED I 15+15	KCFR15	CFR15
ON1FR1I • ON1FR1ID ON1FR1G I 22	1N1FR2I • 1N1FR2ID 1N1FR2G I 22+22	C3830AD	CFR221
ON1FR7I ON1FR7ID I 23		C3728N	CFR2123A
ON1FR1E ON1FR1ED I 21	1N1FR2E 1N1FR2ED I 21-21	C3830AD	CFR221
ON1FR7IX • ON1FR1EA • ON1FR1EX I 23/21			CFR2123A

Each 12/15 liter well, 1 basket included.  
Each 21/22/23 liter well, 2 baskets included.

### AUTOMATIC Fryers



Main features	ON1FR7IX	ON1FR1EA	ON1FR1EX
Automatic basket lift	✓	✓	✓
Digital controls	✓	✓	✓
Pilot flame ignition by IONIZATION system	✓		
Each well delivered with 2 baskets and lid	✓	✓	✓
"V" shaped well	✓		
Heating elements in well		✓	✓
Oil filtering and recycling system	✓		✓

Installation not allowed on beams or frames for "X" models.

\* For 3 mm top thickness, replace letter N of the commercial reference with letter T (see section Icon9000 Plus).

# ICON9000


A wide range of accessories  
to complete your cook line...

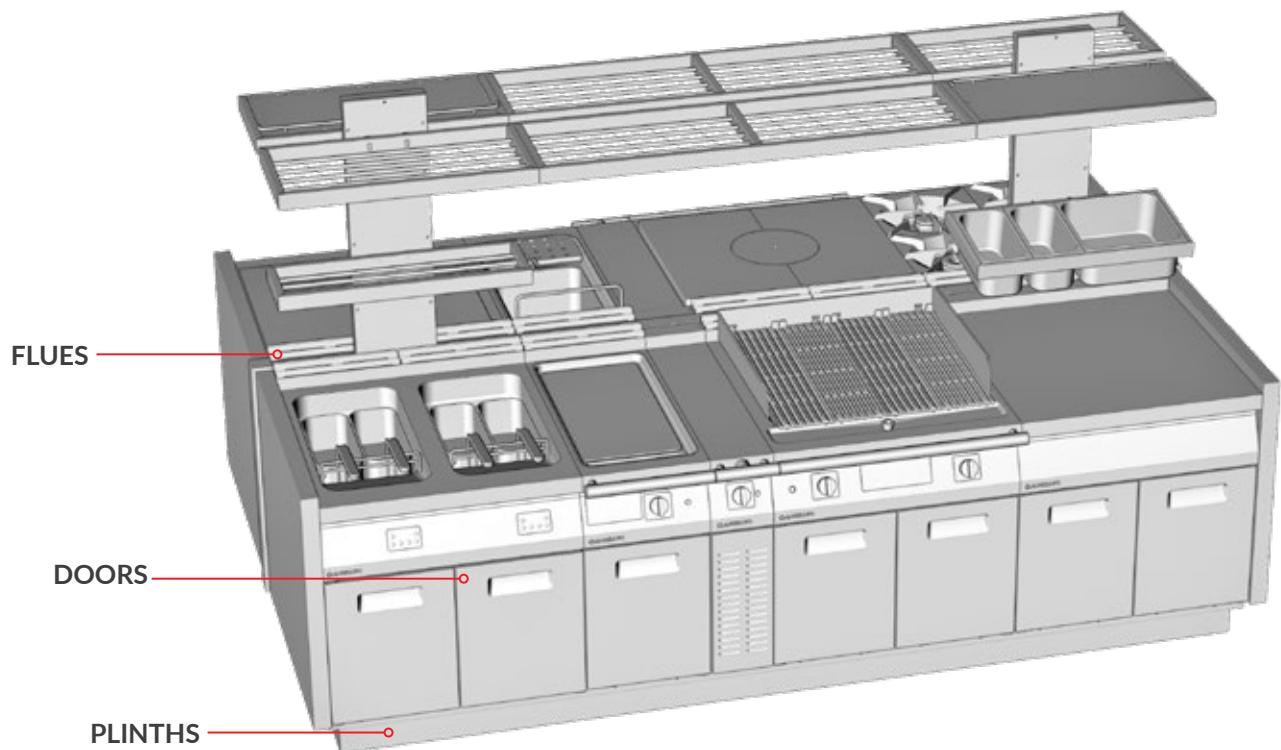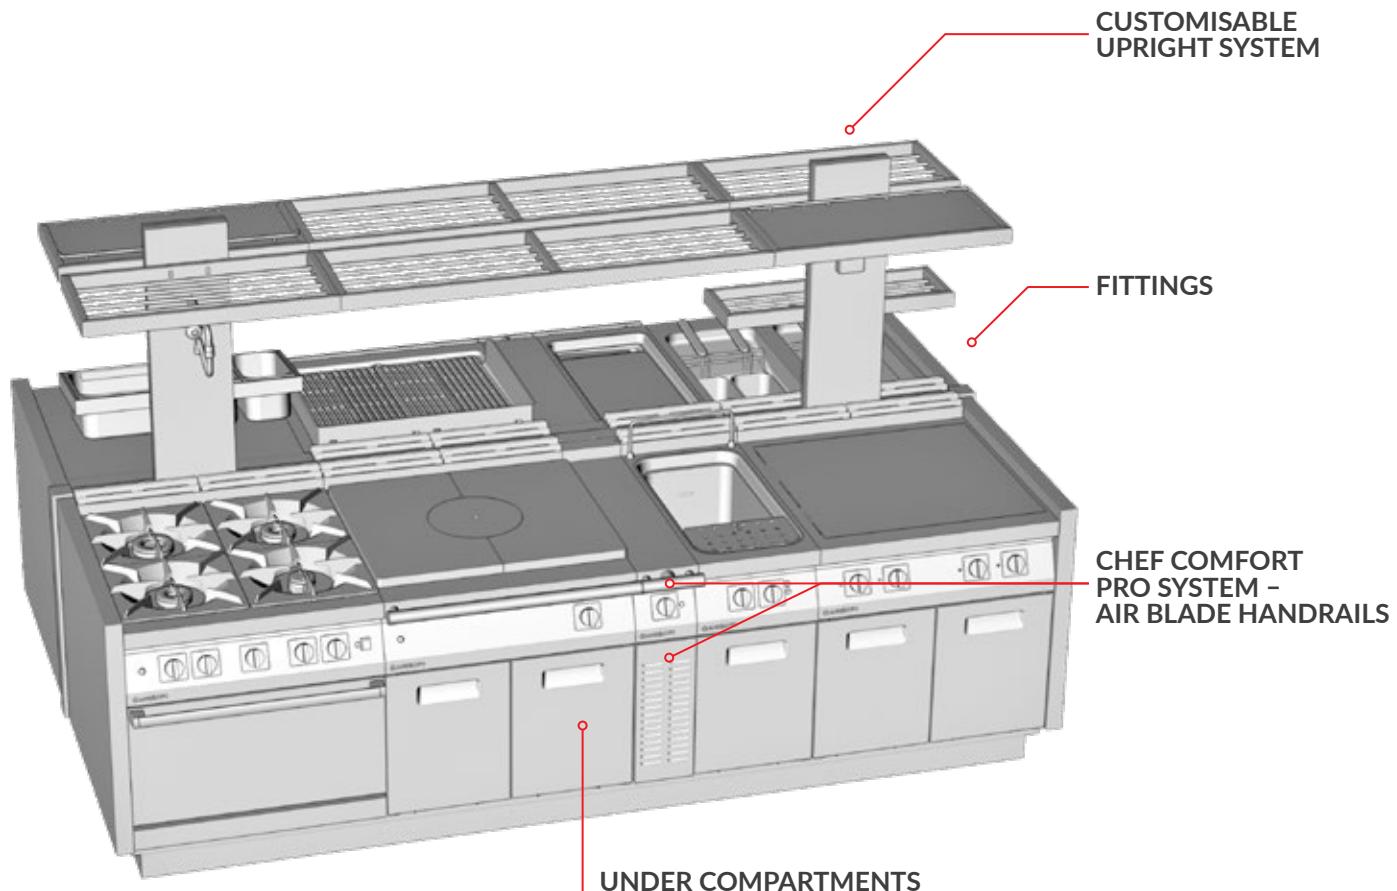

# ICON9000


## ACCESSORIES

## Air blade handrails - CHEF COMFORT PRO

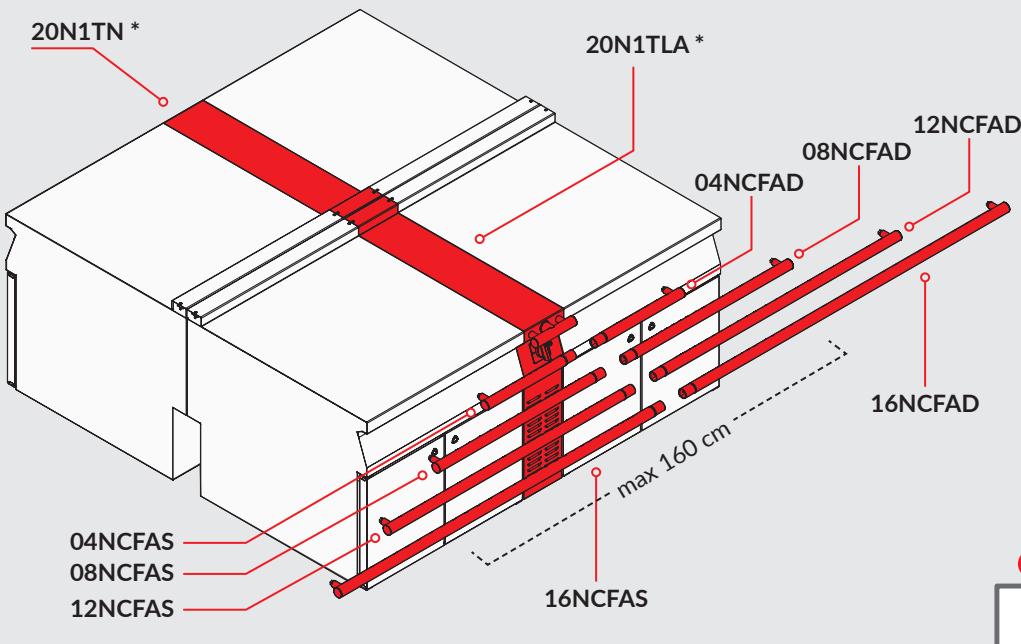


\* For 3 mm top thickness, replace letter N of the commercial reference with letter T (see section Icon9000 Plus).


## Installation on support surfaces and on wheels

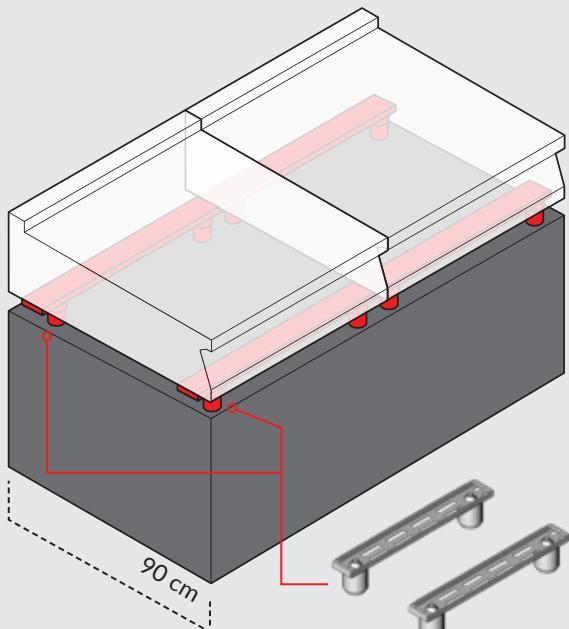


0KPT ÷ 2KPT  
40 ÷ 120 cm

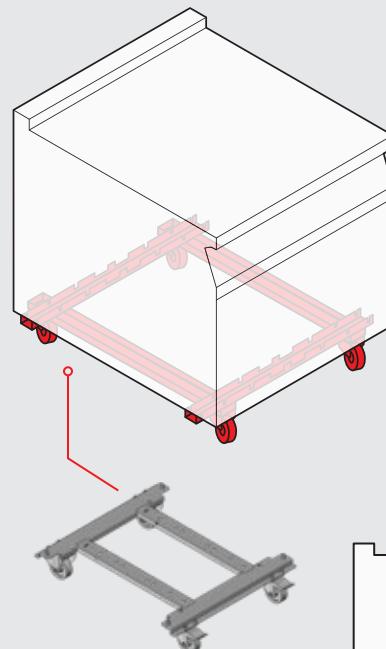


04NTR ÷ 12NTR  
40 ÷ 120 cm

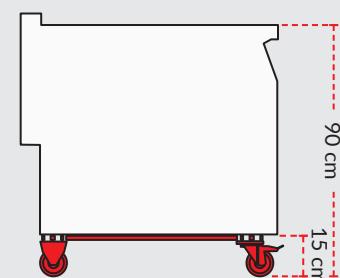

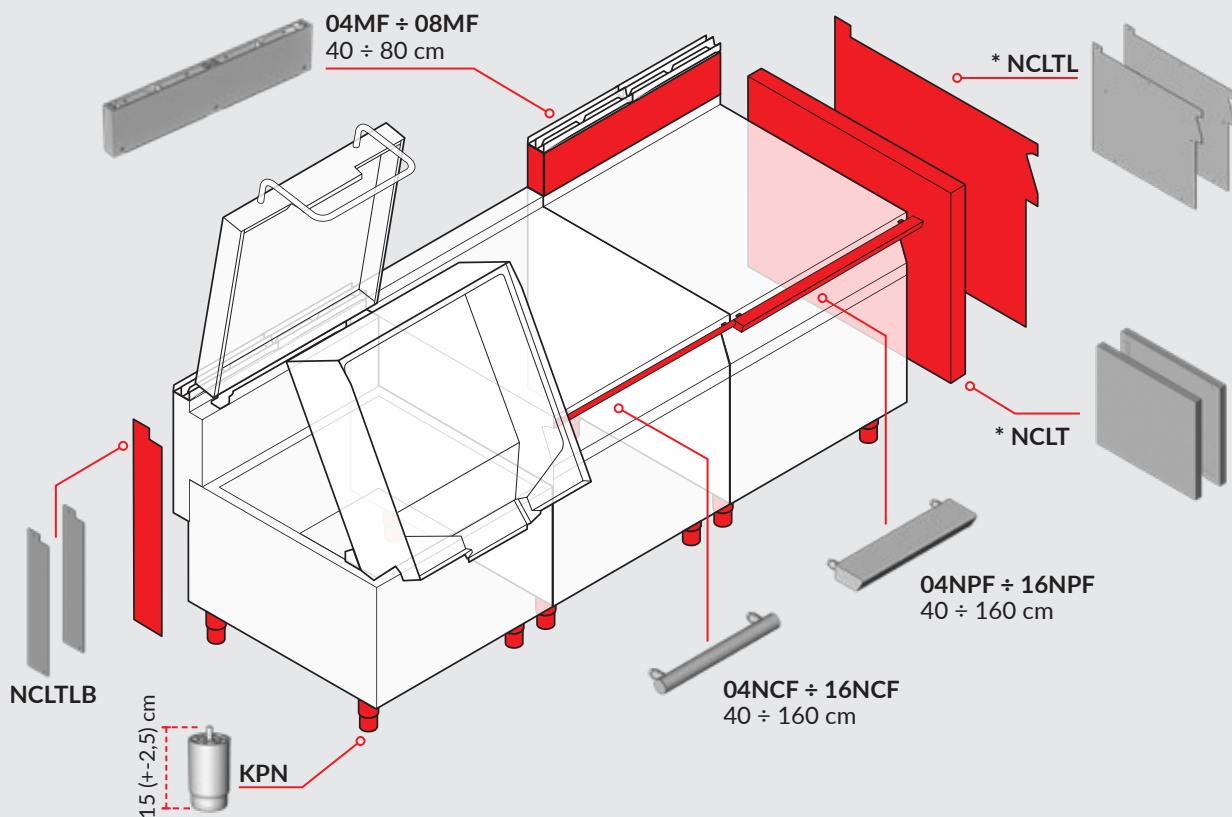


\* INSTALLATION RESTRICTIONS: it is NOT possible to insert next to a bratt pan with tilting well.

### Bridge installation



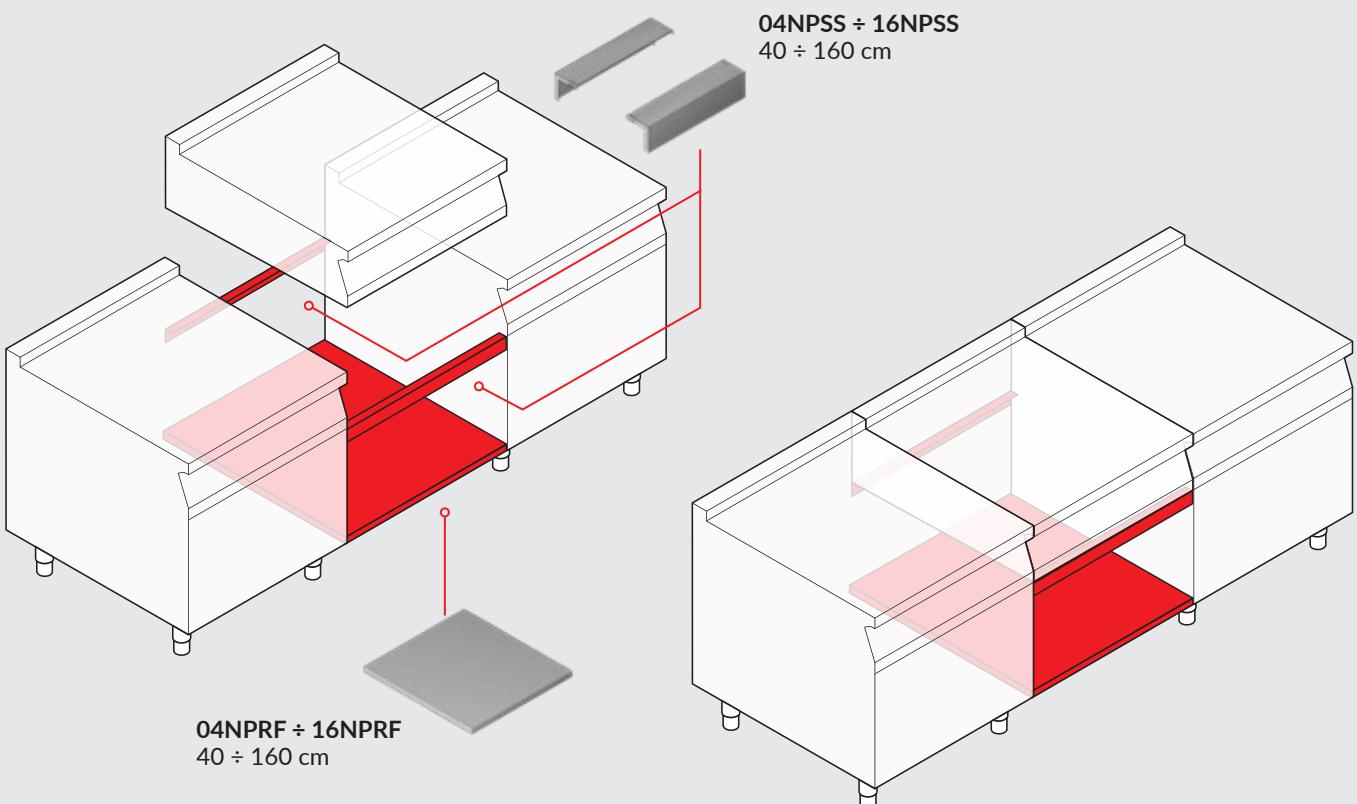


# ICON9000

## ACCESSORIES - STAINLESS STEEL PLINTHS

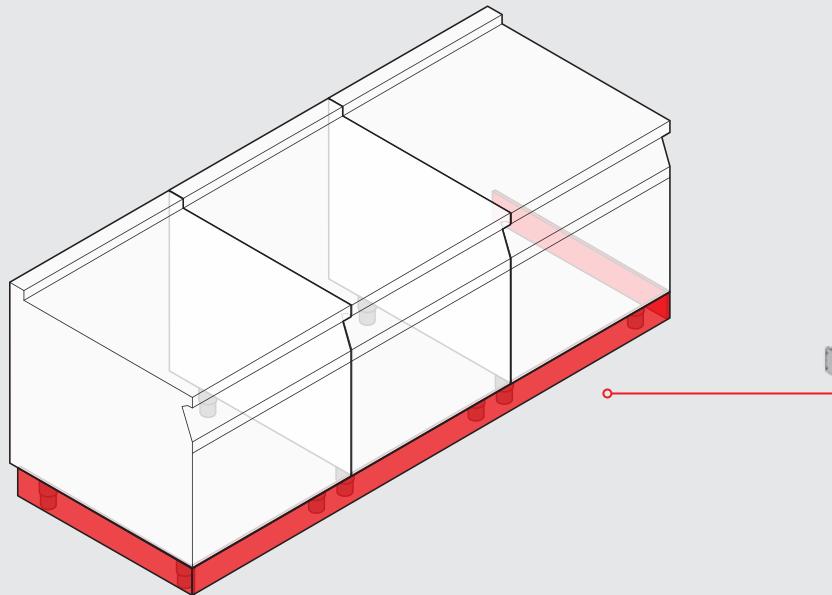

**12NZC ÷ 28NZC**  
120 ÷ 280 cm

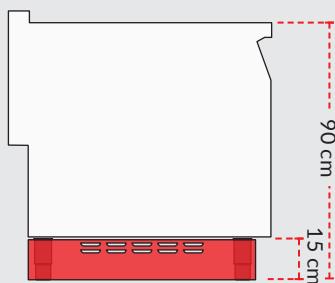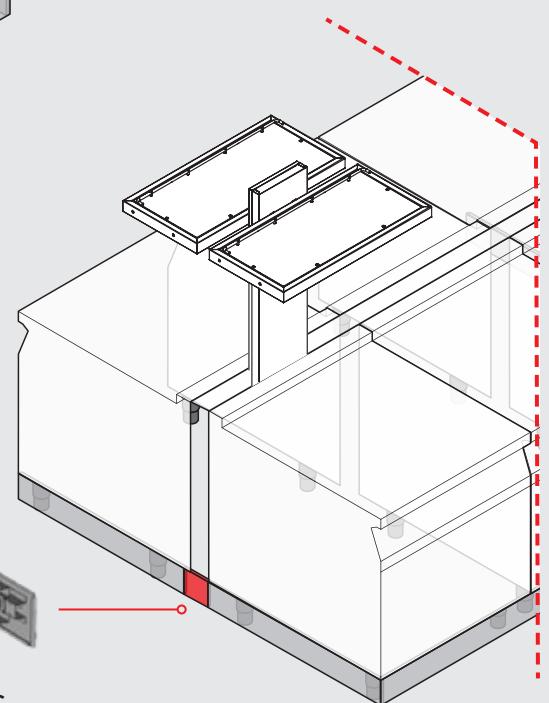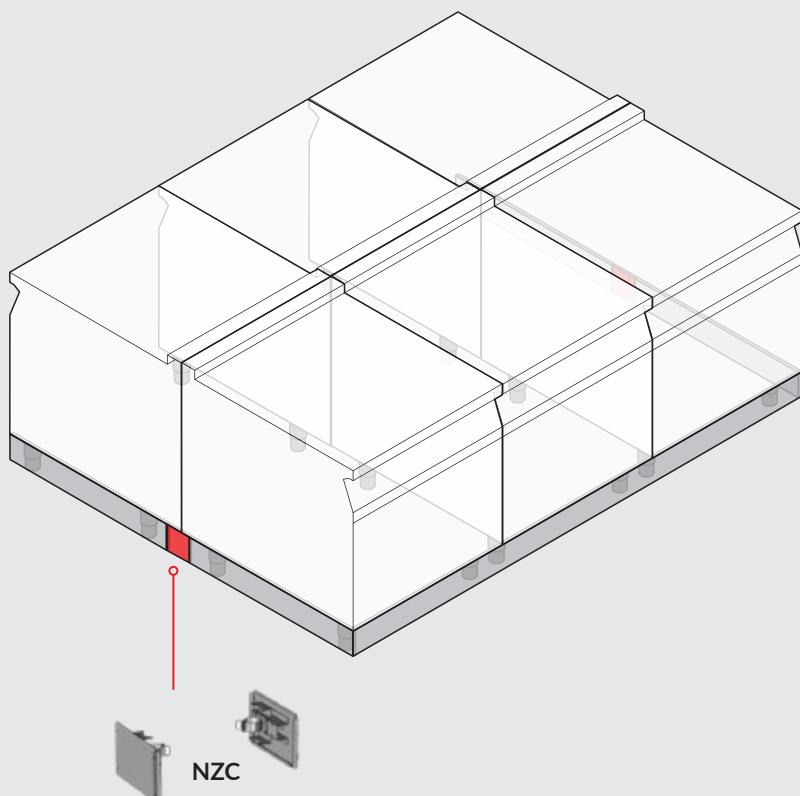


With plinth, cooking top height is fixed, it is not adjustable.

# ICON9000

## INSTALLATION ON MULTI-ELEMENTS SUPPORT


GAMMA  
900 mm

ICON9000  
920 mm

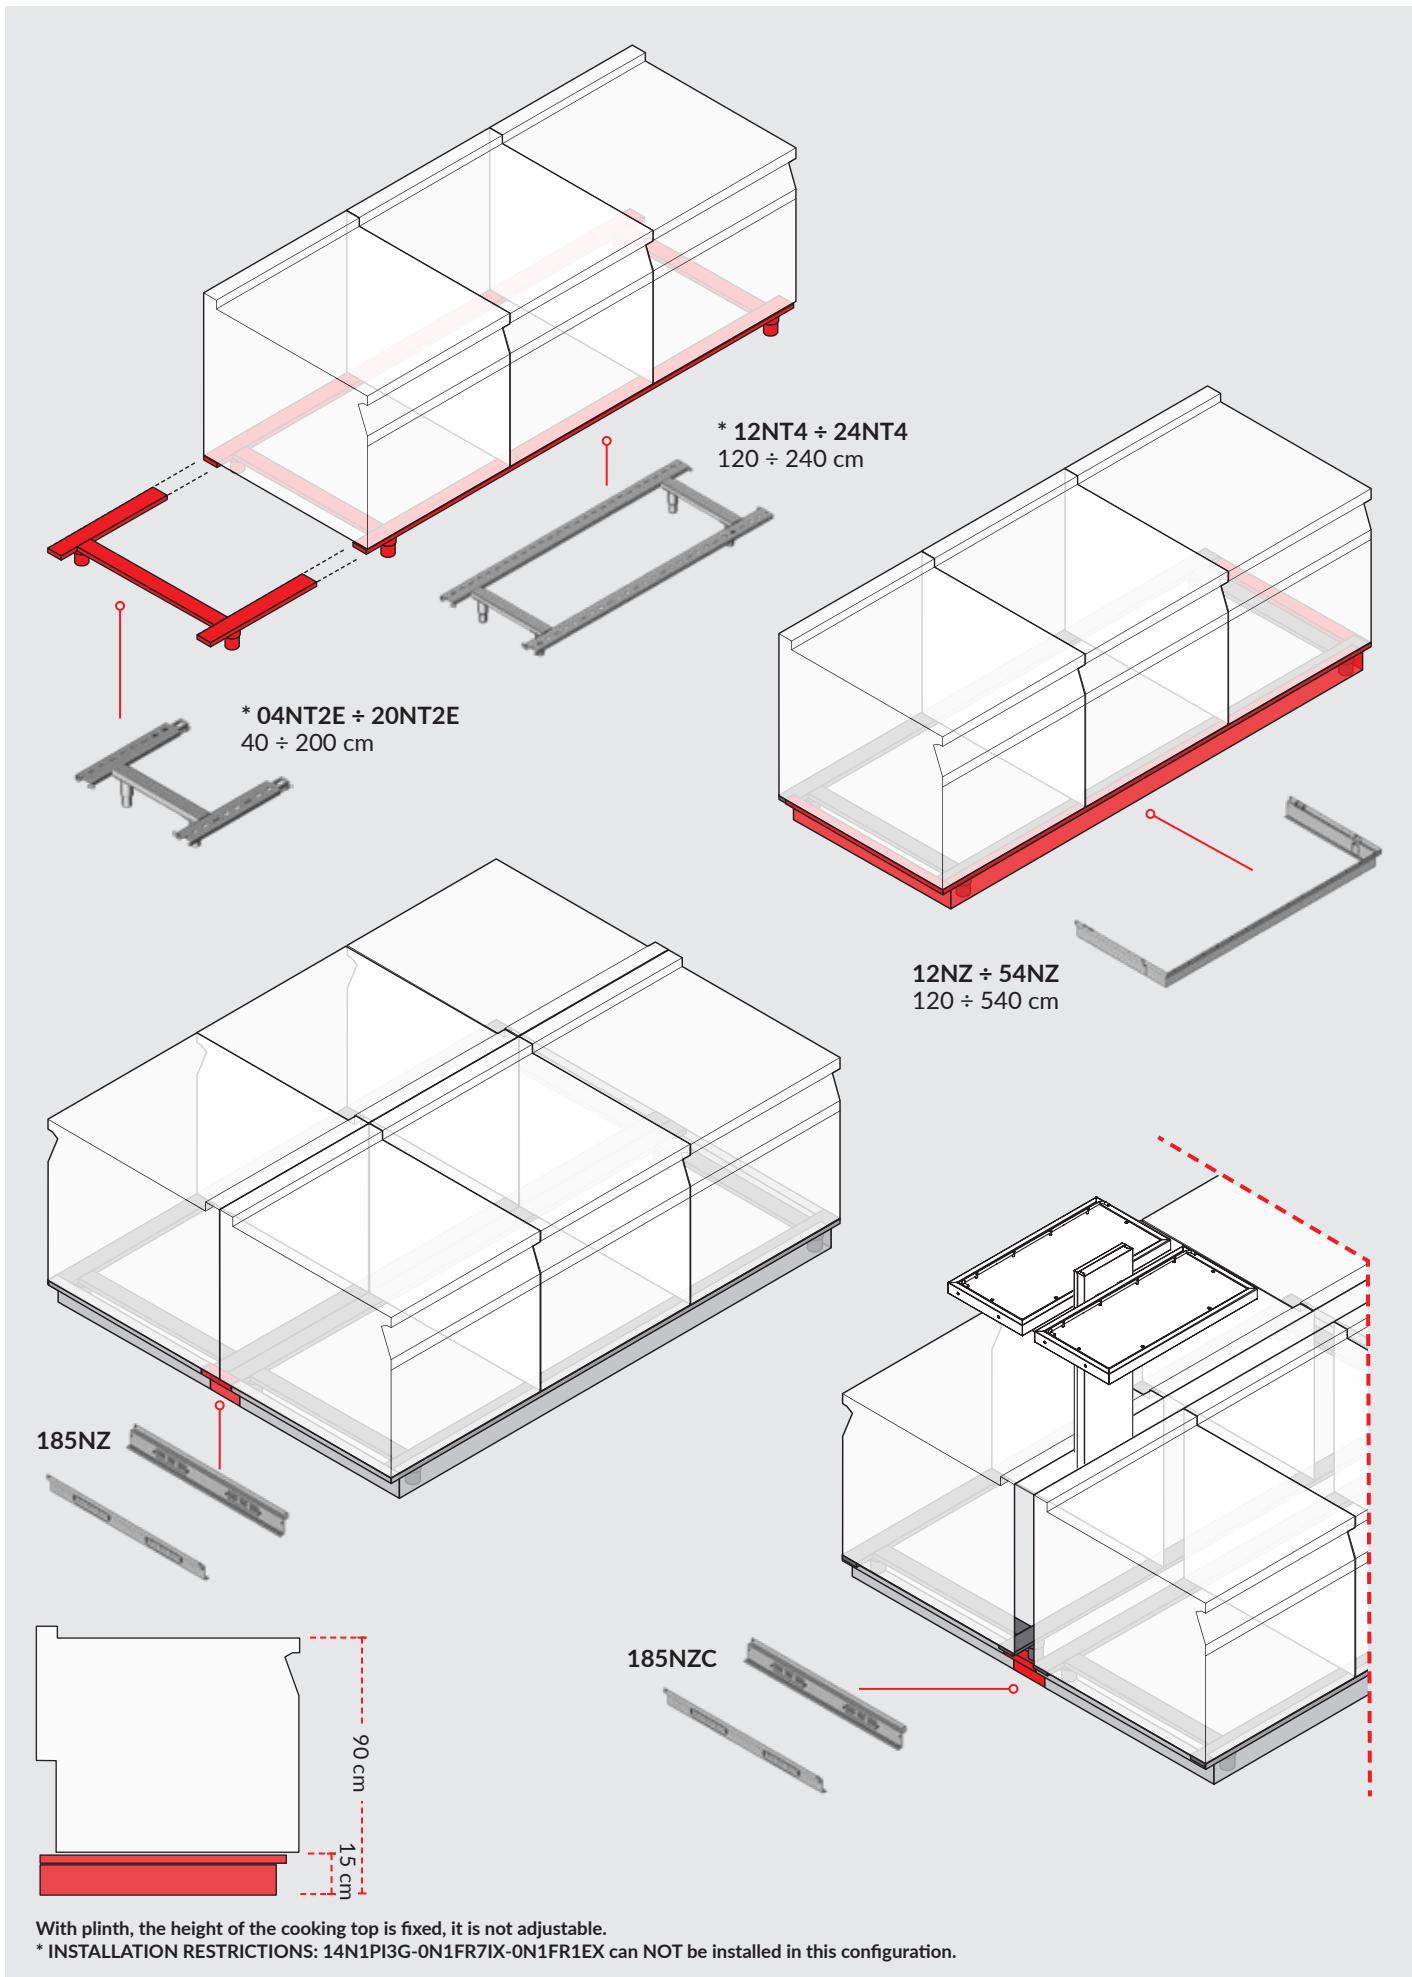

# ICON9000

## INSTALLATION ON SINGLE-FRONT CANTILEVER SUPPORT

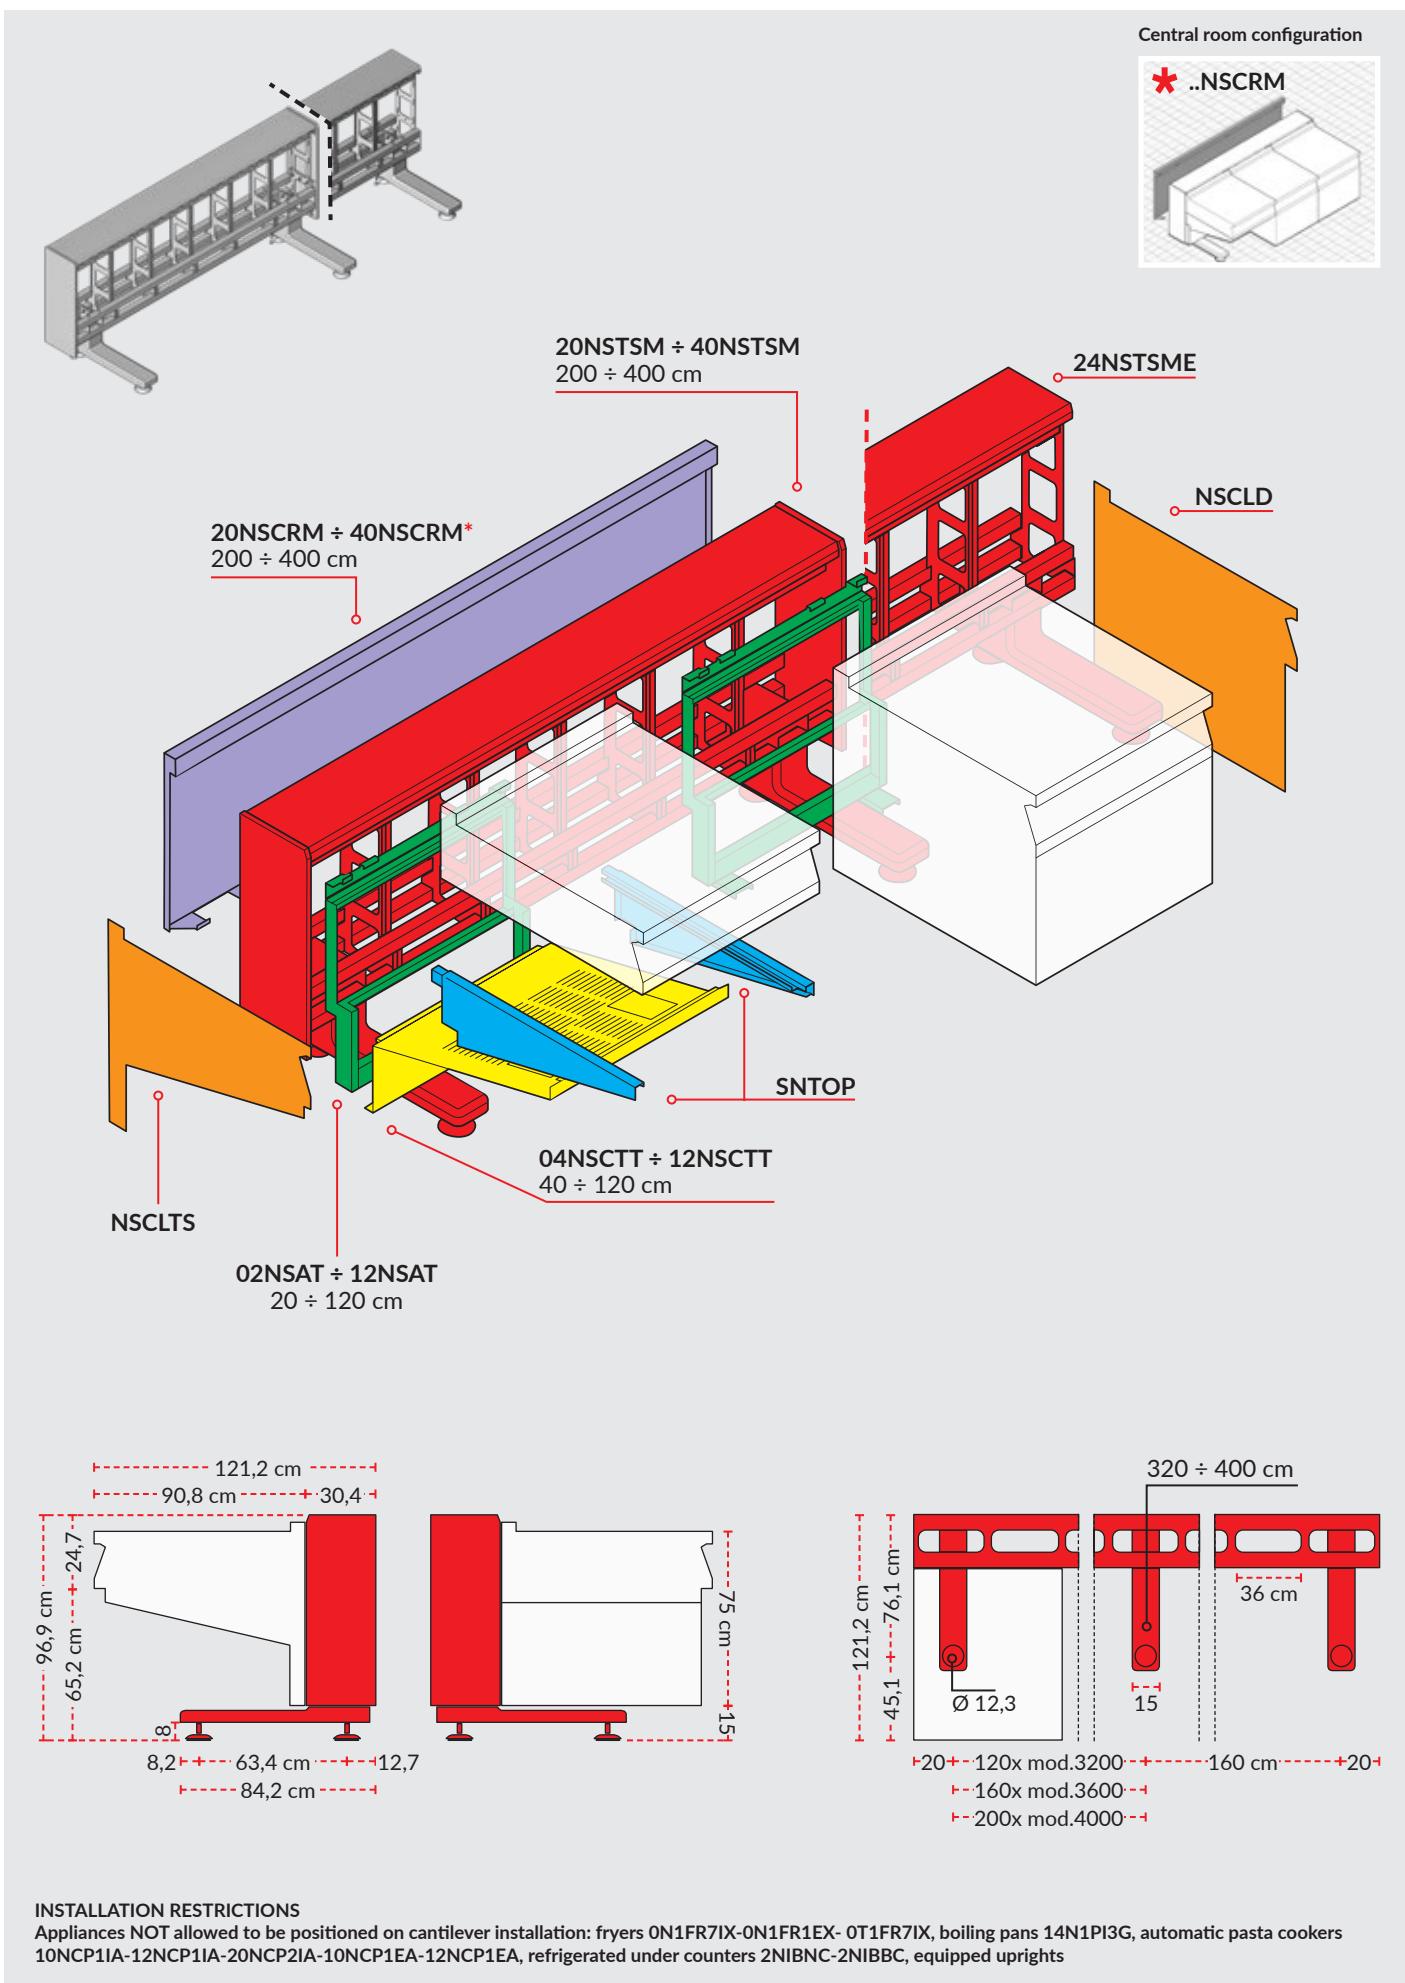


# ICON9000

## INSTALLATION ON DOUBLE-FRONT CANTILEVER SUPPORT

GAMMA  
700 mm

ICON9000  
920 mm

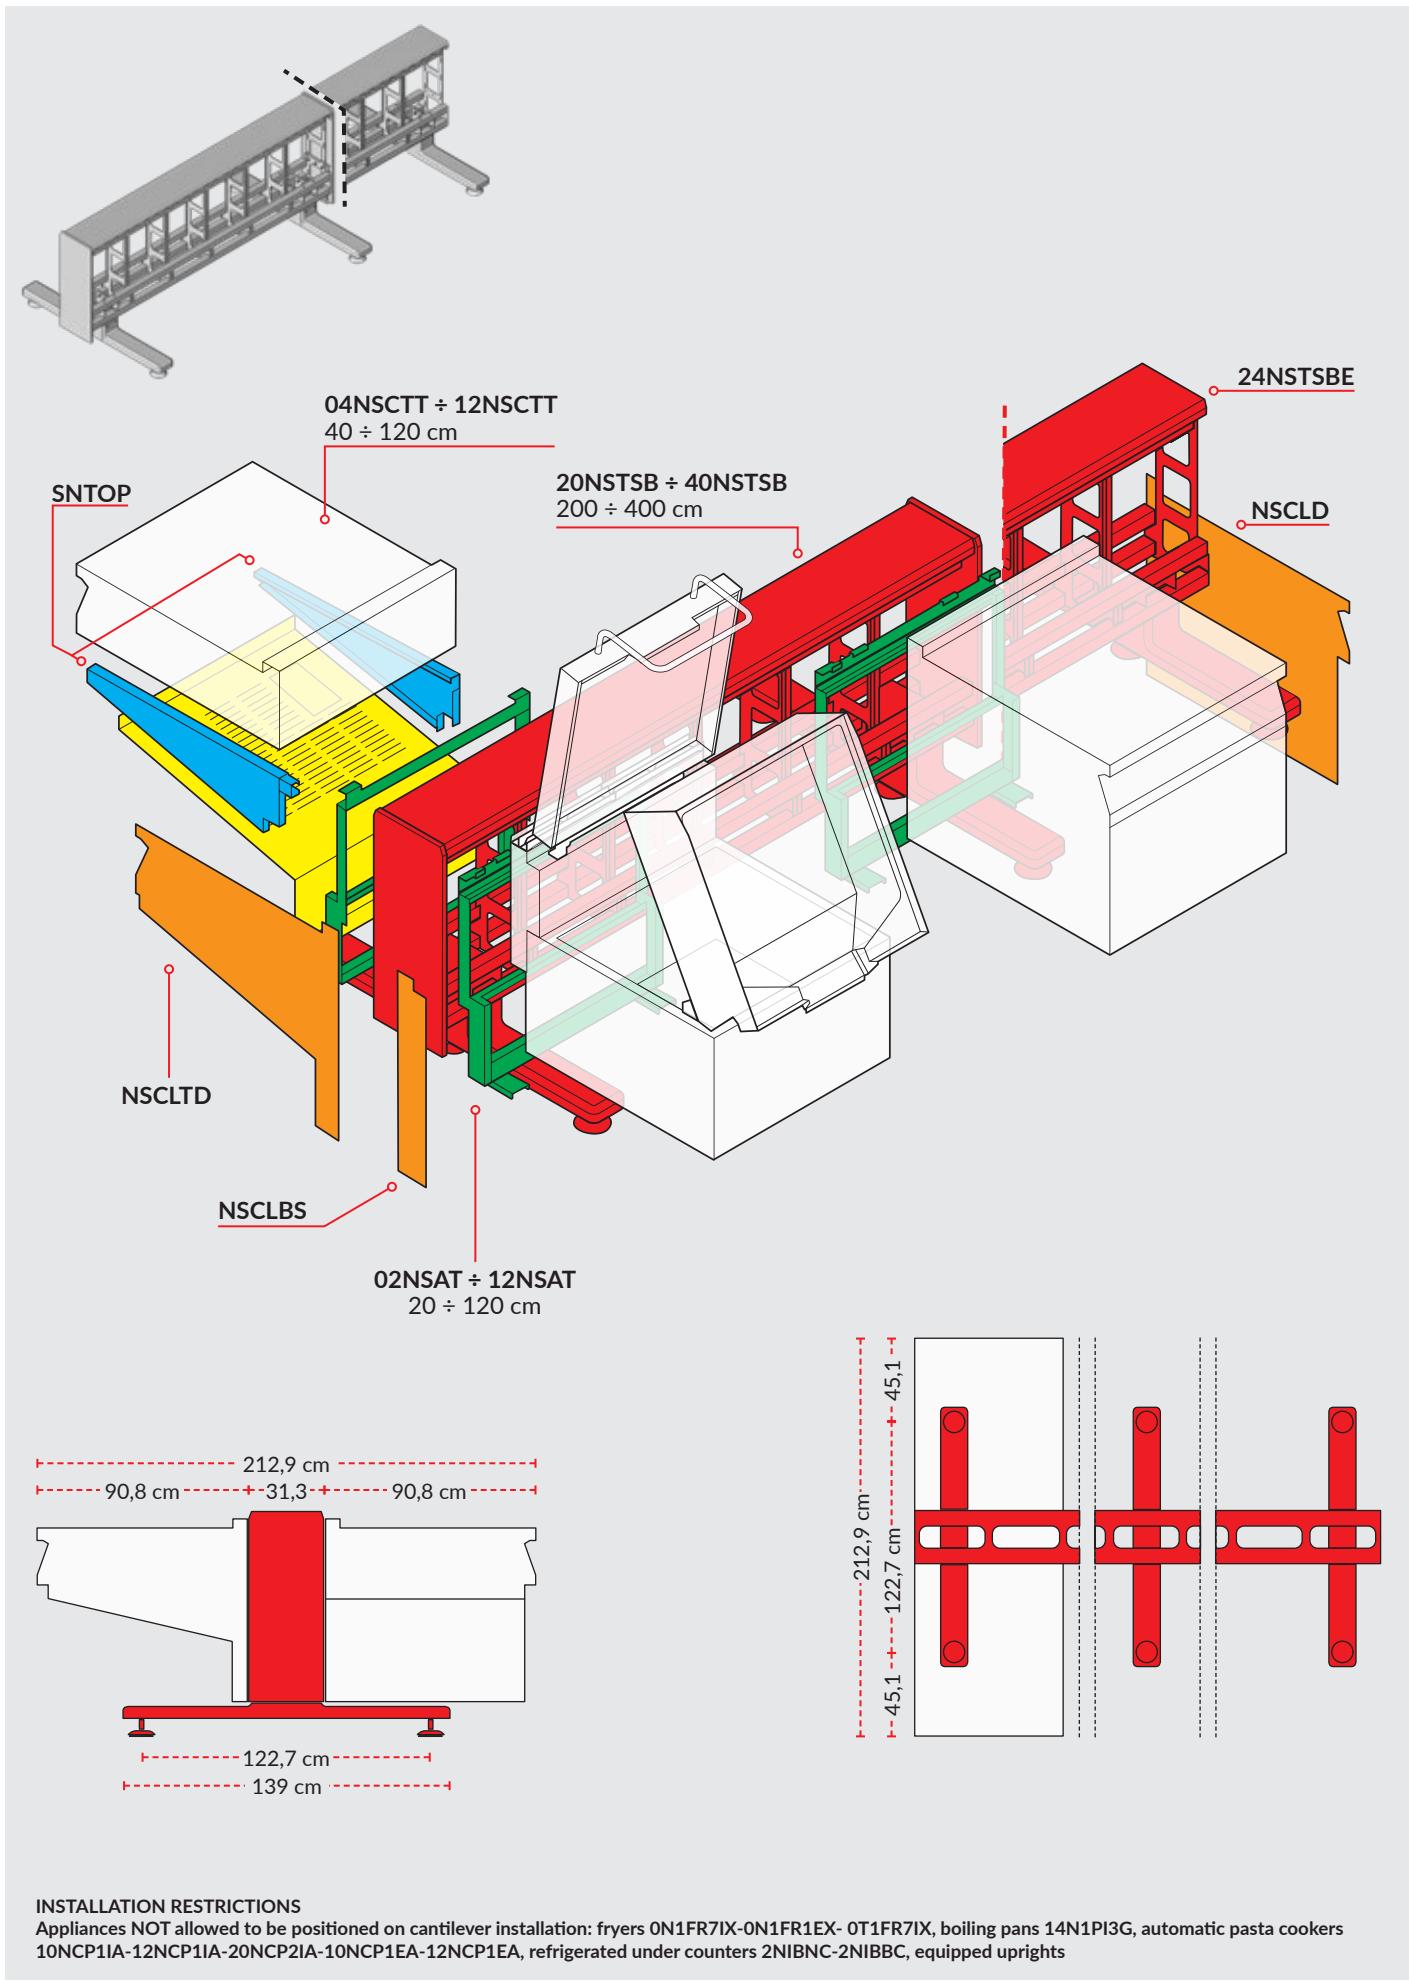



# ICON9000

## EQUIPPED UPRIGHTS

They can be placed separately or in pairs, with or without upper connection grid.

1. In a single cooking block, choose upright with commercial reference CM...
2. Between two cooking blocks, choose upright with commercial reference CB...

Uprights include a shelf on the upper level; they can also be inserted into cooking blocks on multi-support, after checking position of support feet and column supports.

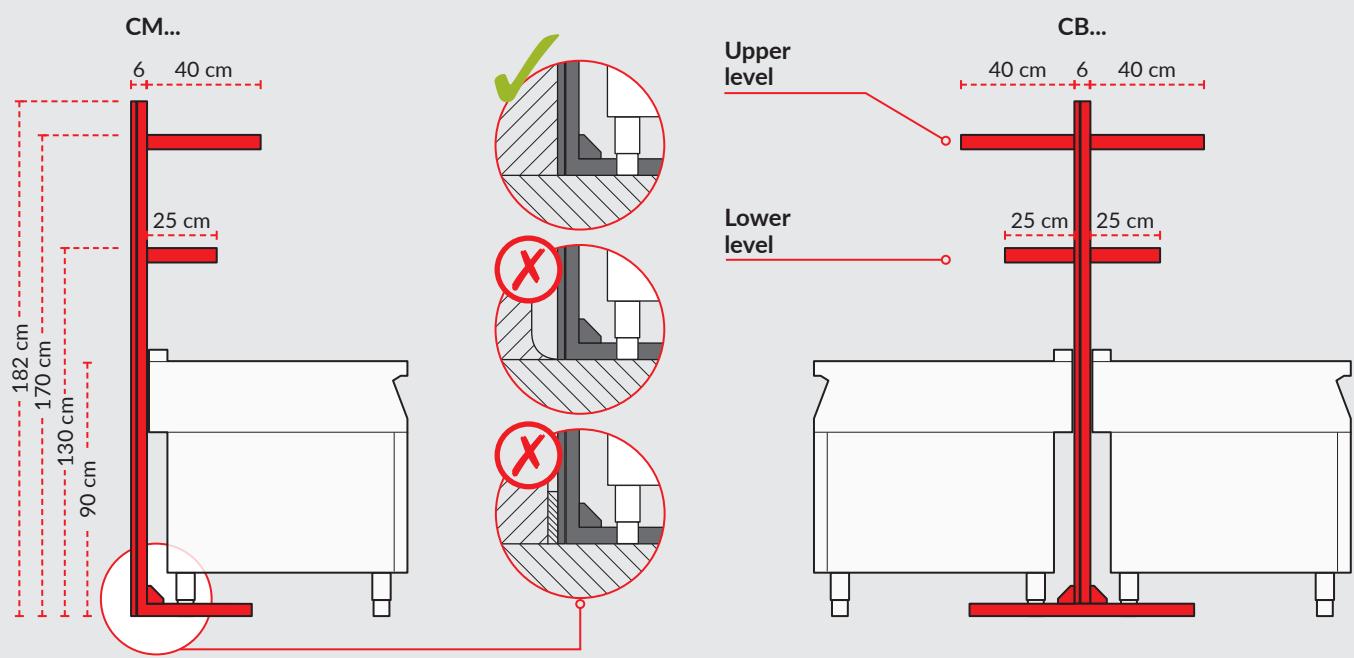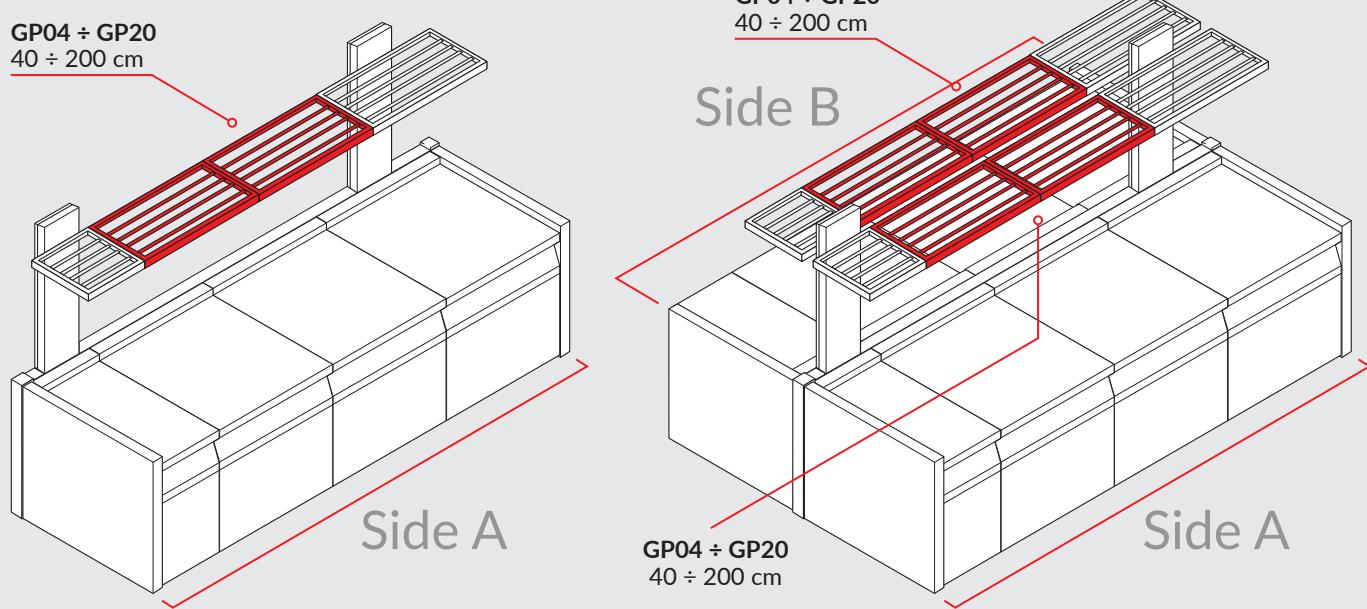


# ICON9000

## HOW TO CHOOSE THE SIZE OF THE UPRIGHT


Match the size of the upright, 40 or 80 cm wide, and the width of the appliance to be connected: in this way the shelf delivered with the upright does not protrude the size of the appliance. In a configuration between two cooking blocks, choose one of the block to

connect upright.

**RESTRICTION:** bratt pan with tilting well can NOT BE connected to upright or, if there are upper connection grids, fitted in the cooking block.

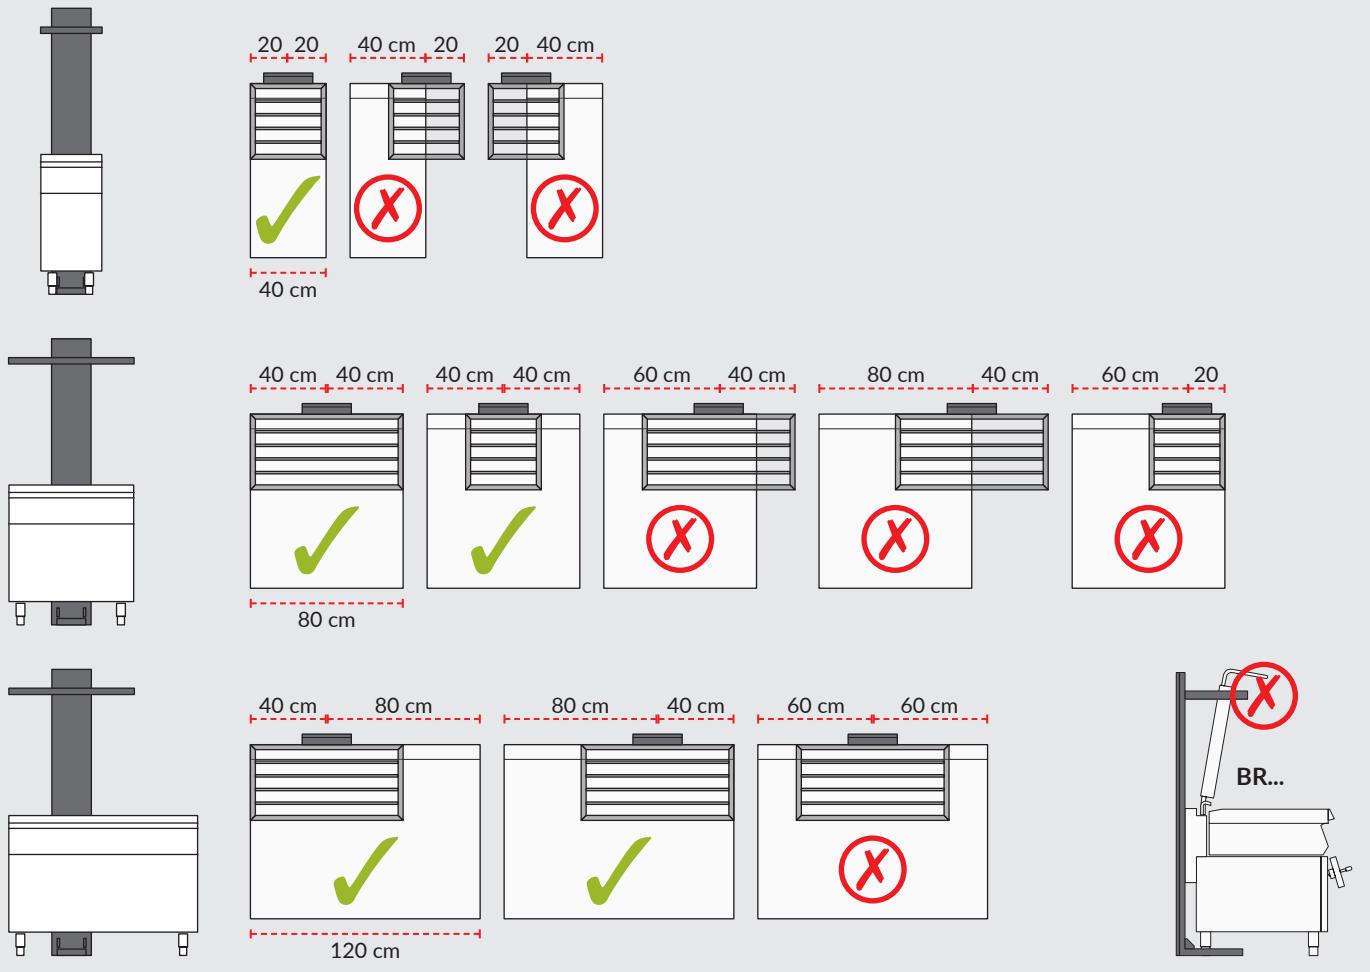

### Upright with led light: appliances matching

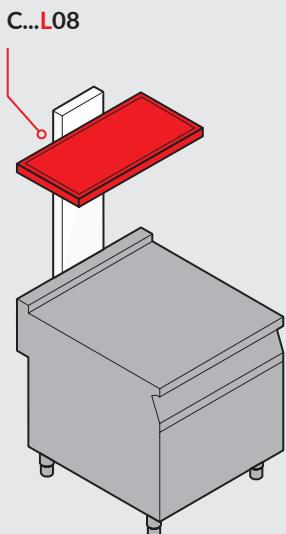

	GAS Operating appliances	TPE Electric solid top ranges	PE Electric plates	VTI Inductions appliances	VTR Wok induction	FTE Infrared appliances	GRE Electric chargrills	PI/PDE Direct and indirect boiling pans	CPE Electric pasta cookers	FRE Electric fryers	SPE Electric chip scuttle	BME Electric bain-marie	NE Appliances on electric under oven	EN Neutral elements
(X)	(X)	(X)	(X)	(✓)	(✓)	(X)	(X)	(X)	(X)	(X)	(X)	(X)	(X)	(✓)

# ICON9000

## HOW TO EQUIP LEVELS

**UPPER LEVEL FITTING:** two or more uprights can be connected by pan support rest, from 40 to 200 cm wide.


**LOWER LEVEL FITTING:** it is possible to equip upright on the lower level with several accessories: shelves, grids, tap

water, container support, electric sockets and heating lamps.

**In a cooking block:** choose accessories with commercial reference A.

**Between two back to back cooking blocks:** provide the first cooking block only with accessories having commercial reference A; on the second cooking block, insert only accessories with commercial reference B.

### LOWER LEVEL accessories: allowed matches to appliances

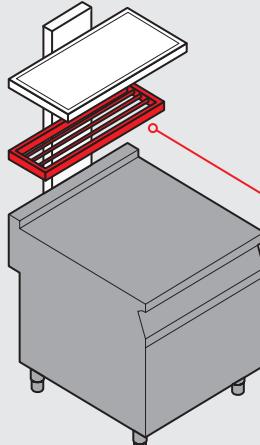

R04IA/B R08IA/B Shelf		Wok Induction, Electric Chargrills, Electric Griddles, Electric Pasta Cookers, Electric Chip Scuttle, Electric Bain-Marie, Neutral Elements
G08IA/B Grilled shelf		Wok Induction, Electric Chargrills, Electric Griddles, Electric Pasta Cookers, Electric Chip Scuttle, Electric Bain-Marie, Neutral Elements
TGNIA/B Support		Recommended on Neutral Elements only
CRAIA/B <sup>1</sup> Tap		Open burners, Neutral Element, Electric Plates, Electric Solid tops
RBE208IA/B <sup>12</sup> Sockets box		Neutral Elements
PE1IA/B <sup>12</sup> Socket		Neutral Elements
RPE104IA/B <sup>12</sup> RPE108IA/B <sup>12</sup> Socket		Neutral Elements
CCIA/B Cover		ALL APPLIANCES

<sup>1</sup> In a configuration with back to back cooking blocks, in correspondence to this accessory the following appliances can NOT be placed: gas operating appliances with fumes flue, gas chargrills.

cooking appliances.  
- If the cooking line includes upright with water tap, between water tap and electric socket there must be a minimum distance of 140 cm.

- If the cooking line includes upright with water tap, between water tap and electric sockets there must be a minimum distance of 140 cm.

#### <sup>2</sup> IP44 SOCKET

- Laterally of the neutral element, in correspondence to the socket, only these appliances can be placed: neutral elements, GRE / GRG, FTE, FTG, FR. All appliances with wells are forbidden and all indirect

#### IP66 SOCKET BOX

- Laterally of the neutral element, in correspondence to sockets, any appliance can be placed, except for the following: CP, BM, PD / PI, BR. All appliances with wells are forbidden.

### LOWER LEVEL accessories: allowed matches in a BACK TO BACK CONFIGURATION

		TGNIB	CRAIB	RBE208IB	PE1IB	RPE104IB RPE108IB
TGNIA		✗	✓	✓	✓	✓
CRAIA		✓	✗	✗	✗	✗
RBE208IA		✓	✗	✓	✓	✓
PE1IA		✓	✗	✓	✗	✗
RPE104IA RPE108IA		✓	✗	✓	✗	✗

# ICON9000

## COMPLETE THE UPRIGHTS


If the LOWER level is not equipped with accessories, it is necessary to complete uprights with a cover:

- CCIA on a cooking unit.
- CCIA + CCIB in a back to back cooking configuration.

### Upper side closing sections:

- TLE02/TLE04 to be positioned on cooking blocks in back to back configuration.
- TLE02M/TLE04M to be positioned on one sided cooking block.

NCTL side panels must always be included in cooking blocks with equipped columns.

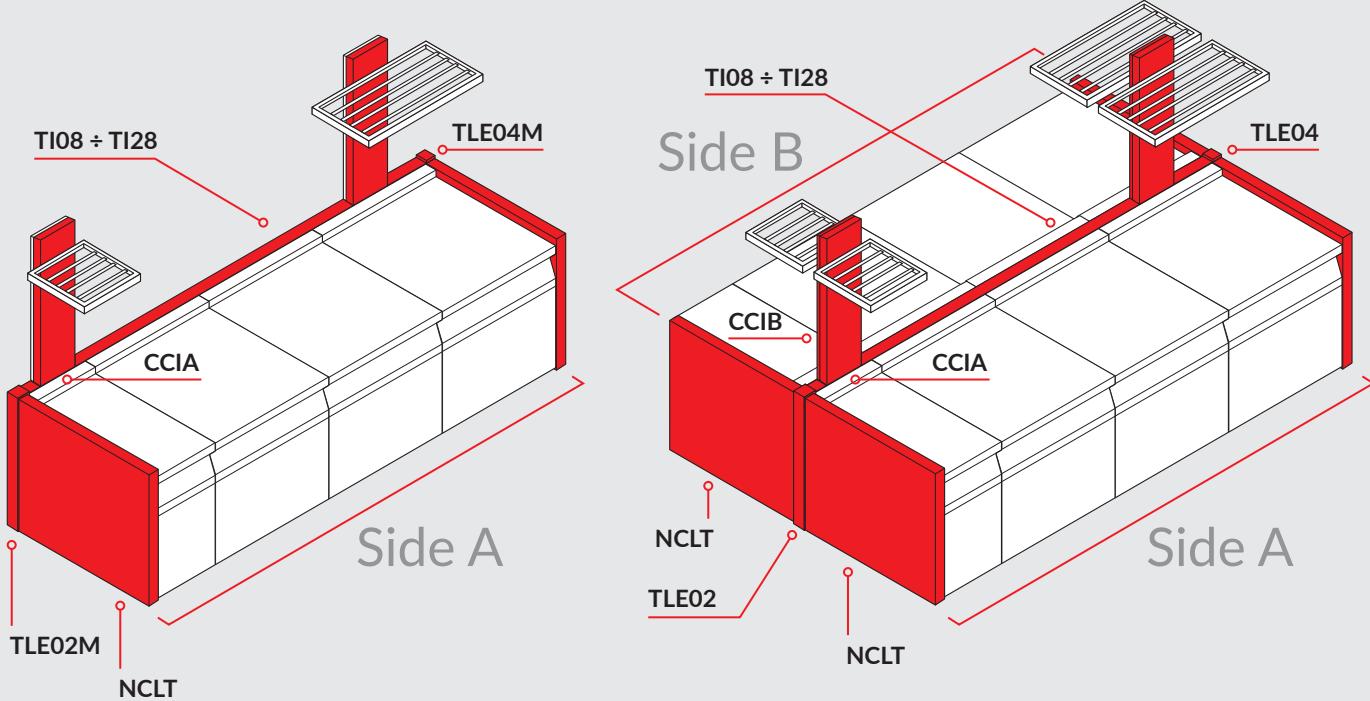


**UPPER MIDDLE CLOSING SECTIONS:** how to choose the length in accordance with the uprights

	nr.2 40cm	nr.1=40cm nr.1=80cm	nr.2 80cm
GP04 - 40 cm	TI08	TI10	TI12
GP06 - 60 cm	TI10	TI12	TI14
GP08 - 80 cm	TI12	TI14	TI16
GP10 - 100 cm	TI14	TI16	TI18
GP12 - 120 cm	TI16	TI18	TI20
GP14 - 140 cm	TI18	TI20	TI22
GP16 - 160 cm	TI20	TI22	TI24
GP18 - 180 cm	TI22	TI24	TI26
GP20 - 200 cm	TI24	TI26	TI28

### UPPER SIDE CLOSING SECTIONS TLE...

TLE02 / TLE02M	TLE04 / TLE04M	TLE04 / TLE04M
40 cm	80 cm	120 cm

### Example

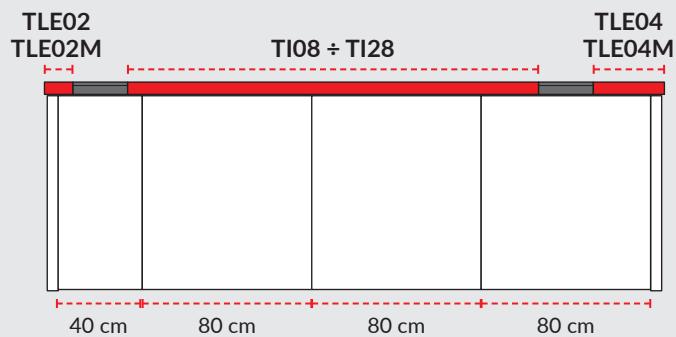

# ICON9000 MODULAR COOKING 2MM


## OPEN BURNERS

Worktop pressed in a single solution. 4 kW burners (single crown), 7 and 10 kW burners (double crown). Burner distribution table in the introductory section to the chapter. Burner grids in enamelled cast iron. Under oven: gas STATIC (...G), PLURI-VENTILATED (...GV) or electric STATIC (...E), PLURI-

VENTILATED (...EV), cooking chamber made of AISI 430 stainless steel, 3 level container removable guides, capacity 3 x GN 2/1, standard equipped with 1 grid GN 2/1 GN, electronic spark ignition in gas version. Side compartment with pressed container guides, capacity 6 x GN 1/1. 2N1FAGF: model with LARGE

SIZED-oven, gas static with electric grill function, cooking chamber made of AISI 430 stainless steel, 3 level container removable guides, capacity each level 1 x GN 1/1 + 1 x GN 2/1, standard equipped with 1 grid, electronic spark ignition.

MOD.	DESCRIPTION	cm	kW	kW	
	<b>ONOFAA</b> 2 BURNER GAS RANGE	40X92X25	17		
	<b>1NOFAD</b> 4 BURNER GAS RANGE	80X92X25	25		
	<b>1NOFA</b> 4 BURNER GAS RANGE	80X92X25	28		
	<b>1NOFAA</b> 4 BURNER GAS RANGE	80X92X25	34		
	<b>1NOFAB</b> TWO BURNER GAS BOILING TABLE, PLATE ON THE RIGHT	80X92X25	23,5		
	<b>2NOFA</b> 6 BURNER GAS RANGE	120X92X25	48		
	<b>2NOFAA</b> 6 BURNER GAS RANGE	120X92X25	51		
	<b>1N1FADG</b> FOUR BURNER GAS RANGE WITH STATIC OVEN	80X92X75	33	0,001	230V 1N~ / 50 ÷ 60HZ
	<b>1N1FADGV</b> FOUR BURNER GAS RANGE WITH TWO-FAN GAS OVEN	80X92X75	33	0,1	230V 1N~ / 50 ÷ 60HZ
	<b>1N1FAG</b> FOUR BURNER GAS RANGE WITH STATIC OVEN	80X92X75	36	0,001	230V 1N~ / 50 ÷ 60HZ
	<b>1N1FAGV</b> FOUR BURNER GAS RANGE WITH TWO-FAN GAS OVEN	80X92X75	36	0,1	230V 1N~ / 50 ÷ 60HZ
	<b>1N1FAAG</b> FOUR BURNER GAS RANGE WITH STATIC OVEN	80X92X75	42	0,001	230V 1N~ / 50 ÷ 60HZ
	<b>1N1FAAGV</b> FOUR BURNER GAS RANGE WITH TWO-FAN GAS OVEN	80X92X75	42	0,1	230V 1N~ / 50 ÷ 60HZ

MOD.	DESCRIPTION	cm	kW	kW	
	<b>1N1FAAEV</b> FOUR BURNER RANGE WITH ELECTRIC TWO FAN CONVECTION OVEN	80X92X75	34	8	400V 3~/50HZ ÷ 60HZ
	<b>1N1FAAE</b> FOUR BURNER RANGE WITH ELECTRIC STATIC OVEN	80X92X75	34	5,4	400V 3~/50HZ ÷ 60HZ
	<b>2N1FAGV</b> SIX BURNER GAS RANGE, TWO FAN CONVECTION GAS OVEN, CABINET	120X92X75	56	0,1	230V 1N~/50Hz ÷ 60HZ
	<b>2N1FAAGV</b> SIX BURNER GAS RANGE, TWO FAN CONVECTION GAS OVEN, CABINET	120X92X75	59	0,1	230V 1N~/50Hz ÷ 60HZ
	<b>2N1FAGF</b> SIX BURNER GAS RANGE WITH LARGE STATIC OVEN	120X92X75	49	3,8	400V 2N~/230V 1N~/50÷60 Hz
	<b>NGA</b> STAINLESS STEEL GRID FOR TWO OPEN BURNERS	35X75X5			
	<b>VSX2</b> TWO BURNER STAINLESS STEEL SURROUNDS				
	<b>VSX4</b> FOUR BURNER STAINLESS STEEL SURROUNDS				
	<b>PLS</b> SMOOTH RADIANT PLATE FOR OPEN BURNERS	38,8X32,2X3			
	<b>PRS</b> RIBBED RADIANT PLATE FOR OPEN BURNERS	38,8X32,2X3			
	<b>DPF</b> 2 CAST IRON FIREPROOF DISCS, Ø 180 MM				
	<b>NCEA</b> WATER FILLING TAP				

## ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	°C
	NCEAM	WATER FILLING TAP			

# ICON9000 MODULAR COOKING 2MM

## FLEXI-PLATE

Appliance with multifunctional plate suitable for direct cooking (like a griddle) and indirect cooking (like solid top boiling plate). Cooking plate in polished AISI 430 stainless steel. 4 cooking independent areas controlled by temperature thermostat, adjustable 110-360°C. Heating through by braze-

welded heating elements. Models equipped with remote control of power peaks: 1NOFPE.

MOD.	DESCRIPTION	cm	kW	kW	
------	-------------	----	----	----	--



1NOFPE	MULTIFUNCTION PLATE FLEXIPLATE	80X92X25	12	400V 3N ~ 50 ÷60 Hz
--------	--------------------------------	----------	----	------------------------

### ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	
------	-------------	----	----	----	--



KPP	KIT FOR PLATE CLEANING
-----	------------------------



RFT	GRIDDLE SCRAPER
-----	-----------------



KLL	SET OF 10 SMOOTH SCRAPER BLADES
-----	---------------------------------



NCEAM	WATER FILLING TAP
-------	-------------------

# ICON9000 MODULAR COOKING 2MM

## SOLID TOP BOILING TABLE

For GAS models, plate heating by a stainless steel central burner, electronic continuous spark ignition. For ELECTRIC models, plate heating through by braze-welded heating elements, independent temperature control on different working area. Under oven: gas PLURI-VENTILATED (...GV) or electric PLURI-

VENTILATED (...EV), cooking chamber made of AISI 430 stainless steel, 3 level container removable guides, capacity 3 x GN 2/1, standard equipped with 1 grid GN 2/1 GN, electronic spark ignition in gas version. Electric models equipped with remote control of power peaks.

MOD.	DESCRIPTION	mm	kW	kW
	<b>0N0TPG</b> COUNTER TOP SOLID GAS RANGE	40X92X25	6,5	0,001 230V 1N~ / 50 ÷ 60HZ
	<b>1N0TPG</b> COUNTER TOP SOLID GAS RANGE	80X92X25	12,5	0,001 230V 1N~ / 50 ÷ 60HZ
	<b>1N1TPGV</b> SOLID TOP GAS RANGE WITH GAS TWO FAN CONVECTION OVEN	80X92X75	20,5	0,001 230V 1N~ / 50 ÷ 60HZ
	<b>0N0TPE</b> SOLID TOP ELECTRIC BOILING TABLE	40X92X25	6	400V 3N ~ 50 ÷ 60 Hz
	<b>1N0TPE</b> SOLID TOP ELECTRIC BOILING TABLE	80X92X25	12	400V 3N ~ 50 ÷ 60 Hz
	<b>1N1TPEEV</b> SOLID TOP ELECTRIC BOILING TABLE ON ELECTRIC TWO-FAN CONVECTION OVEN	80X92X75	19,5	400V 3N ~ 50 ÷ 60 Hz

### ACCESSORIES

MOD.	DESCRIPTION	mm	kW	kW
	<b>NCEAM</b> WATER FILLING TAP			
	<b>KPP</b> KIT FOR PLATE CLEANING			

# ICON9000 MODULAR COOKING 2MM

## ELECTRIC PLATES

Plane with pressed watertight base recess to retain spilled liquids and cast iron plates with watertight seal for protection against spillages. Five-position switch for temperature setting. Under oven electric STATIC (...E), PLURI-VENTILATED (...EV), cooking chamber made of AISI 430 stainless steel, 3 level

container removable guides, capacity 3 x GN 2/1, standard equipped with 1 grid GN 2/1 GN. Models equipped with remote control of power peaks: ONOPE4, 1NOPE4, 1N1PE4EV.

GAMMA  
700 mm

ICON9000  
920 mm

MOD.	DESCRIPTION	cm	kW	kW	
	<b>ONOPE4</b> TWO PLATE ELECTRIC BOILING TABLE	40X92X25	8	400V 3N ~ 50 ÷60 Hz	
	<b>1NOPE4</b> FOUR PLATE ELECTRIC BOILING TABLE	80X92X25	16	400V 3N ~ 50 ÷60 Hz	
	<b>1N1PE4EV</b> 4 PLATE ELECTRIC RANGE, ELECTRIC TWO-FAN CONVECTION OVEN	80X92X75	24	400V 3N ~ 50 ÷60 Hz	
	<b>1N1PE4EL</b> 4 PLATE ELECTRIC RANGE, ELECTRIC STATIC OVEN	80X92X75	21,4	400V 3N ~ 50 ÷60 Hz	
	<b>1N1PE2EL</b> 4 PLATE ELECTRIC RANGE, ELECTRIC STATIC OVEN - 230V	80X92X75	21,4	230V 3 ~ 50 ÷ 60 Hz	

### ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	
	<b>NCEAM</b> WATER FILLING TAP				

# ICON9000 MODULAR COOKING 2MM

## GLASS-CERAMIC

Cooking surface in pyroceram, flush with worktop and sealed. Heating by induction (...VT1I = single zone induction, ...VT2I = all area induction and ...VT1W = wok induction Ø cm 30) or infrared (...VTR). To use electromagnetic induction, pots of suitable material are required.

Models equipped with remote control of power peaks: 0NOVTR, 1NOVTR.

MOD.	DESCRIPTION	cm	kW	kW
	<b>0NOVT1I</b> INDUCTION PYROCERAM COOKING RANGE 2 AREAS	40X92X25	10	400V 3N ~ 50 ÷60 Hz
	<b>0NOVT2I</b> INDUCTION PYROCERAM COOKING RANGE ALL AREAS	40X92X25	10	400V 3N ~ 50 ÷60 Hz
	<b>1N0VT1I</b> INDUCTION PYROCERAM COOKING RANGE 4 AREAS	80X92X25	20	400V 3N ~ 50 ÷60 Hz
	<b>1N0VT2I</b> INDUCTION PYROCERAM COOKING RANGE ALL AREAS	80X92X25	20	400V 3N ~ 50 ÷60 Hz
	<b>0NOVT1W</b> WOK INDUCTION PYROCERAM COOKING RANGE	40X92X25	5	400V 3~ / 50Hz ÷ 60Hz
	<b>0NOVTR</b> INFRARED PYROCERAM COOKING RANGE 2 AREAS	40X92X25	6,8	400V 3N ~ 50 ÷60 Hz
	<b>1NOVTR</b> INFRARED PYROCERAM COOKING RANGE 4 AREAS	80X92X25	13,6	400V 3N ~ 50 ÷60 Hz

## ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	mm
PW350	PAN FOR WOK ELEMENT Ø 30 CM	30X60X10			

GAMMA  
ICON9000  
920 mm

# ICON9000 MODULAR COOKING 2MM

## FRY TOP

Pressed top with a front recess for liquid collection and drain. Cooking plate made of mild steel, compound or chromiumplated, thickness 15 mm. Independent controls on each-cooking area, thermostatic temperature control. Pull-out tray on the front for fat drainage. Gas heating by means of 3

flame branches burners, electronic spark ignition; electric heating by means of armoured elements made in AISI 309 stainless steel. Cooking-Pro System with electric models. Electric models equipped with remote control of power peaks.

MOD.	DESCRIPTION	cm	kW	kW	
	<b>0N0FT1G</b> GAS GRIDDLE SMOOTH PLATE	40X92X25	10,5	0,001	230V 1N~/ 50 ÷ 60HZ
	<b>0N0FT2G</b> GAS GRIDDLE RIBBED PLATE	40X92X25	10,5	0,001	230V 1N~/ 50 ÷ 60HZ
	<b>0N0FT4G</b> GAS GRIDDLE - SMOOTH CHROMIUM PLATE	40X92X25	10,5	0,001	230V 1N~/ 50 ÷ 60HZ
	<b>0N0FT7G</b> GAS GRIDDLE SMOOTH COMPOUND PLATE	40X92X25	10,5	0,001	230V 1N~/ 50 ÷ 60HZ
	<b>1N0FT1G</b> GAS GRIDDLE SMOOTH PLATE	80X92X25	21	0,001	230V 1N~/ 50 ÷ 60HZ
	<b>1N0FT2G</b> GAS GRIDDLE - RIBBED PLATE	80X92X25	21	0,001	230V 1N~/ 50 ÷ 60HZ
	<b>1N0FT3G</b> GAS GRIDDLE - RIBBED/SMOOTH PLATE	80X92X25	21	0,001	230V 1N~/ 50 ÷ 60HZ
	<b>1N0FT4G</b> GAS GRIDDLE - SMOOTH CHROMIUM PLATE	80X92X25	21	0,001	230V 1N~/ 50 ÷ 60HZ
	<b>1N0FT6G</b> GAS GRIDDLE SMOOTH/RIBBED CHROMIUM PLATE	80X92X25	21	0,001	230V 1N~/ 50 ÷ 60HZ
	<b>1N0FT7G</b> GAS GRIDDLE SMOOTH COMPOUND PLATE	80X92X25	21	0,001	230V 1N~/ 50 ÷ 60HZ
	<b>2N0FT1G</b> GAS GRIDDLE SMOOTH PLATE	120X92X25	31,5	0,001	230V 1N~/ 50 ÷ 60HZ
	<b>2N0FT7G</b> GAS GRIDDLE SMOOTH COMPOUND PLATE	120X92X25	31,5	0,001	230V 1N~/ 50 ÷ 60HZ
	<b>0N0FT1E</b> ELECTRIC GRIDDLE - SMOOTH PLATE	40X92X25		5,1	400V 3N~/ 230V 3~/ 50÷60 HZ
	<b>0N0FT2E</b> ELECTRIC GRIDDLE RIBBED PLATE	40X92X25		5,1	400V 3N~/ 230V 3~/ 50÷60 HZ
	<b>0N0FT4E</b> ELECTRIC GRIDDLE SMOOTH CHROMIUM PLATE	40X92X25		5,1	400V 3N~/ 230V 3~/ 50÷60 HZ
	<b>0N0FT7E</b> ELECTRIC GRIDDLE SMOOTH COMPOUND PLATE	40X92X25		5,1	400V 3N~/ 230V 3~/ 50÷60 HZ

MOD.	DESCRIPTION	cm	kW	kW
	<b>1N0FT1E</b> ELECTRIC GRIDDLE SMOOTH PLATE	80X92X25	10,2	400V 3N~ / 230V 3~ / 50÷60 HZ
	<b>1N0FT2E</b> ELECTRIC GRIDDLE - RIBBED PLATE	80X92X25	10,2	400V 3N~ / 230V 3~ / 50÷60 HZ
	<b>1N0FT3E</b> ELECTRIC GRIDDLE - RIBBED/ SMOOTH PLATE	80X92X25	10,2	400V 3N~ / 230V 3~ / 50÷60 HZ
	<b>1N0FT4E</b> ELECTRIC GRIDDLE - SMOOTH CHROMIUM PLATE	80X92X25	10,2	400V 3N~ / 230V 3~ / 50÷60 HZ
	<b>1N0FT6E</b> ELECTRIC GRIDDLE SMOOTH/ RIBBED CHROMIUM PLATE	80X92X25	10,2	400V 3N~ / 230V 3~ / 50÷60 HZ
	<b>1N0FT7E</b> ELECTRIC GRIDDLE SMOOTH COMPOUND PLATE	80X92X25	10,2	400V 3N~ / 230V 3~ / 50÷60 HZ
	<b>2N0FT7E</b> ELECTRIC GRIDDLE SMOOTH COMPOUND PLATE	120X92X25	15,3	400V 3N~ / 230V 3~ / 50÷60 HZ

## ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW
	<b>09PS</b> 40 CM GRIDDLE SPLASH GUARDS			
	<b>19PS</b> 80 CM GRIDDLE SPLASH GUARDS			
	<b>RFT</b> GRIDDLE SCRAPER			
	<b>KLL</b> SET OF 10 SMOOTH SCRAPER BLADES			
	<b>KLRA</b> SET OF 10 RIBBED SCRAPER BLADES GRIDDLES			
	<b>KPP</b> KIT FOR PLATE CLEANING			

# ICON9000 MODULAR COOKING 2MM

## GRILLS

Cooking grid, inclined, made of enamelled cast iron with special nanotechnological surface treatment, which promotes the sliding of cooking fats, make cleaning easier and ensure perfect cooking results. For gas models, heating of ceramic tiles surface through triple flame stainless steel burners

controlled by safety valve, pilot light and thermocouple. For electric models, heating of the cooking grid through electric elements directly in contact with the grid. Water tank for fat collection and smoke removal. Independent control on each-cooking area. Models equipped with remote control of power

peaks: ON0GRE, 1N0GRE, 2N0GRE.

MOD.	DESCRIPTION	cm	kW	kW	
	<b>0N0GRG</b> GAS CHARGRILL	40X92X25	9	0,001	230V 1N~ / 50 ÷ 60HZ
	<b>1N0GRG</b> GAS CHARGRILL	80X92X25	18	0,001	230V 1N~ / 50 ÷ 60HZ
	<b>2N0GRG</b> GAS CHARGRILL	120X92X25	27	0,001	230V 1N~ / 50 ÷ 60HZ
	<b>0N0GRE</b> ELECTRIC GRILL	40X92X25	5,25		400V 3N~ / 230V 3~/ 50÷60 Hz
	<b>1N0GRE</b> ELECTRIC GRILL	80X92X25	10,5		400V 3N~ / 230V 3~/ 50÷60 Hz
	<b>2N0GRE</b> ELECTRIC GRILL	120X92X25	15,75		400V 3N~ / 230V 3~/ 50÷60 Hz

### ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	
	<b>KPP</b> KIT FOR PLATE CLEANING				
	<b>RGRG40</b> GAS GRID HEIGHT ADJUSTMENT - 40 CM				

## ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	
	<b>RGRG80</b>	GAS GRID HEIGHT ADJUSTMENT - 80 CM			
	<b>MGGRG</b>	GRILLED SHELF FOR GAS GRILL			

ICON9000  
920 mmGAMMA  
900 mm

# ICON9000 MODULAR COOKING 2MM

## BOILING PANS

Worktop incorporating the boiling pan fully weld-sealed through continuous welding. Condensation collection rim on the worktop. Rear-hinged spring-loaded lid with handle. Gas/electric, direct/indirect heating. Cylindrical boiling pan container made of AISI 304 stainless steel on the walls and base in

AISI 316L stainless steel. Rectangular boiling pan container made of AISI 316L stainless steel, capacity 3 x GN 1/1. Installation not allowed on cantilever for: 14N1PI3G.

MOD.	DESCRIPTION	cm	kW	kW	
	<b>1N1PI1G</b> GAS INDIRECT HEATED BOILING PAN 100 L	80X92X75	24	0,001	230V 1N~ / 50 ÷ 60HZ
	<b>1N1PI2G</b> GAS INDIRECT HEATED BOILING PAN 140 L	80X92X75	24	0,001	230V 1N~ / 50 ÷ 60HZ
	<b>1N1PD2G</b> GAS DIRECT HEATED BOILING PAN 145 L	80X92X75	24	0,001	230V 1N~ / 50 ÷ 60HZ
	<b>14N1PI3G</b> GAS INDIRECT HEATED BOILING PAN 270 L	140X92X90	44	0,001	230V 1N~ / 50 ÷ 60HZ
	<b>1N1PI1E</b> ELECTRIC INDIRECT HEATED BOILING PAN 100 L	80X92X75		14	400V 3~/50HZ ÷ 60HZ
	<b>1N1PI2E</b> ELECTRIC INDIRECT HEATED BOILING PAN 140 L	80X92X75		14	400V 3~/50HZ ÷ 60HZ

## ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	
	<b>CPX102</b> TWO SECTION STRAINER FOR BOILING PANS 100 L	50X50X41			
	<b>CPX152</b> TWO SECTION STRAINER FOR BOILING PANS 250 L	50X50X48			

# ICON9000 MODULAR COOKING 2MM

## PASTA COOKER

Working top with sealed watertight tank made in AISI 316L stainless steel; large recess to disperse starch and cooking foam; basket shelves at the front. Water filling through tap on the top: automatic (...H) or through manual control knob on control panel (...L). Gas models with electronic continuous spark ignition.

Baskets are compulsory accessories. For the automatic basket lift please choose the accessory 20N1SCP for every tank, for it is compatible with all models.  
Models equipped with remote control of power peaks: ON1CP1EL, ON1CP1EH, 1N1CP2EL, 1N1CP2EH.

MOD.	DESCRIPTION	cm	kW	kW	
	<b>ON1CP1GL</b> GAS PASTA COOKER 1 WELL 40 L	40X92X75	14	0,001	230V 1N~ / 50 ÷ 60HZ
	<b>ON1CP1GH</b> GAS PASTA COOKER 1 WELL 40 L	40X92X75	14	0,001	230V 1N~ / 50 ÷ 60HZ
	<b>1N1CP2GL</b> GAS PASTA COOKER 2 WELLS 40+40 L	80X92X75	28	0,001	230V 1N~ / 50 ÷ 60HZ
	<b>1N1CP2GH</b> GAS PASTA COOKER 2 WELLS 40+40 L	80X92X75	28	0,001	230V 1N~ / 50 ÷ 60HZ
	<b>ON1CP1EL</b> ELECTRIC PASTA COOKER 1 WELL 40 L	40X92X75	12	400V 3N ~ 50 ÷ 60 HZ	
	<b>ON1CP1EH</b> ELECTRIC PASTA COOKER 1 WELL 40 L	40X92X75	12	400V 3N ~ 50 ÷ 60 HZ	
	<b>1N1CP2EL</b> ELECTRIC PASTA COOKER 2 WELLS, 40+40 L	80X92X75	24	400V 3N ~ 50 ÷ 60 HZ	
	<b>1N1CP2EH</b> ELECTRIC PASTA COOKER 2 WELLS, 40+40 L	80X92X75	24	400V 3N ~ 50 ÷ 60 HZ	

## ACCESSORIES

	MOD.	DESCRIPTION				
	20N1SCP	BASKET LIFT FOR 40 L PASTA COOKER WELL	20X92X75	0,2	230V 1N~ / 50HZ	
	KSCP	3 PASTA COOKER BASKETS FOR AUTOMATIC LIFTER				
	KSCP6	6 PASTA COOKER BASKETS FOR AUTOMATIC LIFTER				
	KCP40	4 BASKETS FOR 40 LTS PASTA COOKER				
	C0909	PASTA COOKER BASKET 1, 5 L				
	C2715	PASTA COOKER BASKET 6,6 L				
	C0930	PASTA COOKER BASKET 4,8 L				
	C1830	PASTA COOKER BASKET 10 L				
	C2830	PASTA COOKER BASKET 15 L				
	C4627	PASTA COOKER BASKET 23,5 L				
	C2327	PASTA COOKER BASKET 12 L				
	CV40	PASTA COOKER LID 40 L				

# ICON9000 MODULAR COOKING 2MM

## AUTOMATIC MULTI-COOKER

Automatic multi-cooker with AISI 304 stainless steel self-supporting structure (AISI 316 tank), honeycomb lid, completely withdrawable basket with automatic lift. Automatic management of power supply, cooking programs and water level in the tank. Standard extractable shower head. For gas

models: heating with burners, electronic management of ignition and flame ionization. For electric models: heating with three electric heaters immersed in water. Electric models equipped with remote control of power peaks.

MOD.	DESCRIPTION	cm	kW	kW	
 10NCP1IA	GAS AUTOMATIC UNIVERSAL COOKER / PASTA COOKER, 150 LT WELL	100X92X90	24	0,18	230V 1N~ / 50HZ
 12NCP1IA	GAS AUTOMATIC UNIVERSAL COOKER / PASTA COOKER, 200 LT WELL	120X92X90	30	0,18	230V 1N~ / 50HZ
 20NCP2IA	GAS AUTOMATIC UNIVERSAL COOKER / PASTA COOKER, 2 WELLS 150+150 LT	200X92X90	48	0,35	230V 1N~ / 50HZ
10NCP1EA	ELECTRIC AUTOMATIC UNIVERSAL COOKER / PASTA COOKER, 150 LT WELL	100X92X90	18	400V 3N ~ 50 ÷60 Hz	
12NCP1EA	ELECTRIC AUTOMATIC PASTA COOKER / UNIVERSAL COOKER, 200 LT WELL	120X92X90	18	400V 3N ~ 50 ÷60 Hz	
<hr/>					
<b>ACCESSORIES</b>					
MOD.	DESCRIPTION	cm	kW	kW	
 CC21	TROLLEY FOR AUTOMATIC PASTA COOKER WITH CONTAINER	77X83X117,5			
 B11M20	CONTAINER GN 1/1 H = 200 WITH UNIVERSAL HANDLES	32X53X20			
 CCP150	BASKET FOR THIN PASTA FOR 150 LITRE WELL				
 CCP200	BASKET FOR THIN PASTA FOR 200 LITRE WELL				

# ICON9000 MODULAR COOKING 2MM

## FRYERS 12 L

**TANKS WITH 12-LITER CAPACITY**  
 Oil tanks fully weld-sealed to worktop, cold-pressed with rounded edges for improved cleaning. Large oil expansion space in the upper section. Electronic continuous spark system ignition by gas models. Temperature control with thermostat and safety thermostat. Each

tank delivered with 1 basket and lid.  
 Models with digital controls (FR...D)



### MOD. DESCRIPTION

cm kW kW

ON1FR3G	GAS FRYER 1 WELL 12 L	40X92X75	11	0,03	230V 1N~/50HZ
---------	-----------------------	----------	----	------	---------------

ON1FR3GD	GAS FRYER 1 WELL 12 L DIGITAL CONTROLS	40X92X75	11	0,03	230V 1N~/50HZ
----------	--	----------	----	------	---------------



1N1FR4G	GAS FRYER 2 WELLS 12+12 L	80X92X75	22	0,05	230V 1N~/50HZ
---------	---------------------------	----------	----	------	---------------

1N1FR4GD	GAS FRYER 2 WELLS 12+12 L DIGITAL CONTROLS	80X92X75	22	0,06	230V 1N~/50HZ
----------	--	----------	----	------	---------------



0NOSPE	ELECTRIC CHIP SCUTTLE	40X92X25	1	230V 1N~/50Hz
--------	-----------------------	----------	---	---------------

## ACCESSORIES

### MOD. DESCRIPTION

cm kW kW

KCFR12	2 BASKETS FOR GAS FRYER WELLS 12 L
--------	------------------------------------

CFR91214	BASKET FOR FRYER WELL 9/12/14 L	22,5X28,3X11,5
----------	---------------------------------	----------------



FO	OIL FILTER
----	------------



RO	OIL DRAIN CONTAINER	35X50X31,5
----	---------------------	------------

# ICON9000 MODULAR COOKING 2MM

## FRYERS 15 L

**TANKS WITH 15-LITER CAPACITY**  
 Oil tanks fully weld-sealed to worktop, cold-pressed with rounded edges for improved cleaning. Large oil expansion space in the upper section. Temperature control with thermostat and safety thermostat. Each tank delivered with 1 basket and lid. Models with digital

controls (FR...D) Electric models equipped with remote control of power peaks.

MOD.	DESCRIPTION				
	<b>ON1FR5E</b> ELECTRIC FRYER 1 WELL 15 L	40X92X75	10,5	400V 3N~ / 230V 3~/ 50÷60 HZ	
	<b>ON1FR5ED</b> ELECTRIC FRYER 1 WELL 15 L DIGITAL CONTROLS	40X92X75	10,5	400V 3N~ / 230V 3~/ 50÷60 HZ	
	<b>1N1FR6E</b> ELECTRIC FRYER 2 WELLS 15+15 L	80X92X75	21	400V 3N~ / 230V 3~/ 50÷60 HZ	
	<b>1N1FR6ED</b> ELECTRIC FRYER 2 WELLS 15+15 L DIGITAL CONTROLS	80X92X75	21	400V 3N~ / 230V 3~/ 50÷60 HZ	
<hr/>					
<b>ACCESSORIES</b>					
	<b>KCFR15</b> 2 BASKETS FOR ELECTRIC FRYER 15 L				
	<b>CFR15</b> BASKET FOR ELECTRIC FRYER WELL 15 L	22,5X28,3X15,5			
	<b>FO</b> OIL FILTER				
	<b>RO</b> OIL DRAIN CONTAINER	35X50X31,5			

# ICON9000 MODULAR COOKING 2MM

## FRYERS 21-23 L

TANKS WITH 21-23-LITER CAPACITY  
 Oil tanks fully weld-sealed to worktop,  
 cold-pressed with rounded edges for  
 improved cleaning. Large oil expansion  
 space in the upper section. "V" shaped  
 tank for model ...FR7. Temperature  
 control with thermostat and safety  
 thermostat. For gas models electronic

management of ignition by ionization,  
 assuring safety and easier service.  
 Models with digital controls (FR...D)  
 Each tank delivered with 2 baskets and  
 lids. Electric models equipped with  
 remote control of power peaks.

MOD.	DESCRIPTION	cm	kW	kW	
------	-------------	----	----	----	--



<b>ON1FR1I</b>	GAS FRYER 1 WELL 22 L	40X92X75	21	0,03	230V 1N~ / 50HZ
----------------	-----------------------	----------	----	------	-----------------

<b>ON1FR1ID</b>	GAS FRYER 1 WELL 22 L DIGITAL CONTROLS	40X92X75	21	0,03	230V 1N~ / 50HZ
-----------------	--	----------	----	------	-----------------

<b>ON1FR7I</b>	GAS FRYER 1 WELL 23 L V SHAPED	40X92X75	25	0,035	230V 1N~ / 50HZ
----------------	--------------------------------	----------	----	-------	-----------------

<b>ON1FR7ID</b>	GAS FRYER 1 WELL 23 L V SHAPED DIGITAL CONTROLS	40X92X75	25	0,06	230V 1N~ / 50HZ
-----------------	---	----------	----	------	-----------------



<b>1N1FR2I</b>	GAS FRYER 2 WELLS 22+22 L	80X92X75	42	0,05	230V 1N~ / 50HZ
----------------	---------------------------	----------	----	------	-----------------

<b>1N1FR2ID</b>	GAS FRYER 2 WELLS 22+22 L DIGITAL CONTROLS	80X92X75	42	0,06	230V 1N~ / 50HZ
-----------------	--	----------	----	------	-----------------



<b>ON1FR1E</b>	ELECTRIC FRYER 1 WELL 21 L	40X92X75	18	400V 3N ~ 50 ÷60 Hz
----------------	----------------------------	----------	----	---------------------

<b>ON1FR1ED</b>	ELECTRIC FRYER 1 WELL 21 L DIGITAL CONTROLS	40X92X75	18	400V 3N ~ 50 ÷60 Hz
-----------------	---	----------	----	---------------------



<b>1N1FR2E</b>	ELECTRIC FRYER 2 WELLS 21+21 L	80X92X75	36	400V 3N ~ 50 ÷60 Hz
----------------	--------------------------------	----------	----	---------------------

<b>1N1FR2ED</b>	ELECTRIC FRYER 2 WELLS 21+21 L DIGITAL CONTROLS	80X92X75	36	400V 3N ~ 50 ÷60 Hz
-----------------	---	----------	----	---------------------

## ACCESSORIES

GAMMA  
700 mm

MOD.	DESCRIPTION	cm	kW	kW
 C3728N	FRYER BASKET FOR ...FR7.. FRYER	27,8X36,8X13		
 C3830AD	FRYER BASKET	30X38X12		
 CFR221	BASKET FOR FRYER WELL 22 L	15X36,8X12		
 CFR2123A	BASKET FOR FRYER WITH 21/22/23 L WELL AND AUTOMATIC MODELS	13,3X36,8X13		
 FO	OIL FILTER			
 RO	OIL DRAIN CONTAINER	35X50X31,5		

ICON9000  
920 mm

# ICON9000 MODULAR COOKING 2MM

## FRYERS 22 L

TANKS WITH 22-LITER CAPACITY  
 Oil tanks fully weld-sealed to worktop,  
 cold-pressed with rounded edges for  
 improved cleaning. Large oil expansion  
 space in the upper section. Temperature  
 control with thermostat and safety  
 thermostat. Gas models with electronic  
 continuous spark ignition. Each tank

delivered with 2 baskets and lids.

MOD.	DESCRIPTION	cm	kW	kW	
	<b>ON1FR1G</b> GAS FRYER 1 WELL 22 L	40X92X75	21	0,03	230V 1N~/50HZ
	<b>1N1FR2G</b> GAS FRYER 2 WELLS 22+22 L	80X92X75	42	0,05	230V 1N~/50HZ

### ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	
	<b>C3830AD</b> FRYER BASKET	30X38X12			
	<b>CFR221</b> BASKET FOR FRYER WELL 22 L	15X36,8X12			
	<b>FO</b> OIL FILTER				
	<b>RO</b> OIL DRAIN CONTAINER	35X50X31,5			

# ICON9000 MODULAR COOKING 2MM

## AUTOMATIC FRYERS

**AUTOMATIC BASKET LIFT WITH STANDARD DIGITAL CONTROLS.** For gas models electronic management of ignition by ionization, assuring safety and easier service. Each tank delivered with 2 baskets. "V" shaped tank for model ...FR7. Oil filtering and recycling system for the models... X. Installation

not allowed on beams or frames for "X" models: ON1FR7IX, ON1FR1EX. Models equipped with remote control of power peaks: ON1FR1EX.

MOD.	DESCRIPTION	cm	kW	kW	
	ON1FR7IX GAS FRYER 1 WELL 23 L V SHAPED DIGITAL CONTROLS	40X92X90	25	0,1	230V 1N~ / 50HZ
	ON1FR1EA ELECTRIC FRYER 1 WELL 21 L DIGITAL CONTROLS	40X92X75	18		400V 3N ~ 50 ÷60 HZ
	ON1FR1EX ELECTRIC FRYER 1 WELL 21 L DIGITAL CONTROLS	40X92X90	18		400V 3N ~ 50 ÷60 HZ

### ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	
	CFR2123A BASKET FOR FRYER WITH 21/22/23 L WELL AND AUTOMATIC MODELS	13,3X36,8X13			
	FO OIL FILTER				
	RO OIL DRAIN CONTAINER	35X50X31,5			

# ICON9000 MODULAR COOKING 2MM

## BRATT PANS

Bratt pans... BR2... with tank fully made of AISI 304 stainless steel. 85 or 125 liter capacity. Tank bottom in mild steel available upon request. Bratt pans... BR3... with tank fully made of AISI 304 stainless steel, tank bottom in COMPOUND, 85 or 125 liter capacity. Bratt pan with fixed tank (...F) made of

AISI 304 stainless steel, tank bottom in COMPOUND, 35 liter capacity (no Cooking-Pro). Gas/electric heating, manual (...BR2... / ...BR3...) or automatic tank lifting (...BR2...A... / ...BR3...A...). Active protection thermostat and micro-switch cutting off the power supply when the tank is raised. Cooking-Pro

System with electric models. Electric models equipped with remote control of power peaks.

MOD.	DESCRIPTION	mm	kW	kW	
 1N1BR2G	GAS BRATT PAN - MANUAL TILTING	80X92X75	20	0,05	230V 1N~/50HZ
 1N1BR3G	GAS BRATT PAN - MANUAL TILTING	80X92X75	20	0,05	230V 1N~/50HZ
 1N1BR2GA	GAS BRATT PAN - AUTOMATIC TILTING	80X92X75	20	0,15	230V 1N~/50HZ
 1N1BR3GA	GAS BRATT PAN - AUTOMATIC TILTING	80X92X75	20	0,15	230V 1N~/50HZ
 2N1BR2G	GAS BRATT PAN - MANUAL TILTING	120X92X75	30	0,001	230V 1N~/50HZ
 2N1BR3G	GAS BRATT PAN - MANUAL TILTING	120X92X75	30	0,001	230V 1N~/50HZ
 2N1BR2GA	GAS BRATT PAN - AUTOMATIC TILTING	120X92X75	30	0,17	400V 3N~/230V 3~/50HZ
 2N1BR3GA	GAS BRATT PAN - AUTOMATIC TILTING	120X92X75	30	0,17	400V 3N~/230V 3~/50HZ
 1N1BR2E	ELECTRIC BRATT PAN - MANUAL TILTING	80X92X75		10,2	400V 3N~/230V 3~/50÷60 HZ
 1N1BR3E	ELECTRIC BRATT PAN - MANUAL TILTING	80X92X75		10,2	400V 3N~/230V 3~/50÷60 HZ
 1N1BR2EA	ELECTRIC BRATT PAN - AUTOMATIC TILTING	80X92X75		10,2	400V 3N~/230V 3~/50÷60 HZ
 1N1BR3EA	ELECTRIC BRATT PAN - AUTOMATIC TILTING	80X92X75		10,2	400V 3N~/230V 3~/50÷60 HZ
 2N1BR2E	ELECTRIC BRATT PAN - MANUAL TILTING	120X92X75		15,3	400V 3N~/230V 3~/50÷60 HZ
 2N1BR3E	ELECTRIC BRATT PAN - MANUAL TILTING	120X92X75		15,3	400V 3N~/230V 3~/50÷60 HZ
 2N1BR2EA	ELECTRIC BRATT PAN - AUTOMATIC TILTING	120X92X75		15,3	400V 3N~/230V 3~/50÷60 HZ
 2N1BR3EA	ELECTRIC BRATT PAN - AUTOMATIC TILTING	120X92X75		15,3	400V 3N~/230V 3~/50÷60 HZ
 1N1BR3EF	ELECTRIC BRATT PAN WITH FIXED WELL	80X92X75		10	400V 3N~/230V 3~/50÷60 HZ

## ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW
 CB21	TROLLEY FOR BRATT PAN WITH CONTAINER	75,5X81,2X78		
 B11M20	CONTAINER GN 1/1 H = 200 WITH UNIVERSAL HANDLES	32X53X20		

GAMMA  
700 mm  
  
ICON9000  
920 mm

# ICON9000 MODULAR COOKING 2MM

## BAIN-MARIE

Pressed tank in AISI 304 stainless steel, with rounded corners. Manual water filling. Tank drainage with rotary control on the front of the machine, allowing a quick and effective emptying. Temperature with thermostatic control and safety thermostat. Useful tank to contain basins GN. Basins are

compulsory accessories. Electric models equipped with remote control of power peaks.

MOD.	DESCRIPTION	cm	kW	kW
	<b>ON0BM1G</b> GAS WET WELL BAIN-MARIE	40X92X25	5	0,001 230V 1N~ / 50 ÷ 60HZ
	<b>ON0BM1E</b> ELECTRIC BAIN MARIE	40X92X25	2,55	230V 1N~ / 50 ÷ 60HZ
	<b>1N0BM2G</b> GAS WET WELL BAIN-MARIE	80X92X25	8	0,001 230V 1N~ / 50 ÷ 60HZ
	<b>1N0BM2E</b> ELECTRIC BAIN MARIE	80X92X25	5,1	400V 3N~ / 230V 3~/ 50÷60 Hz
<hr/>				
<b>ACCESSORIES</b>				
MOD.	DESCRIPTION	cm	kW	kW
	<b>OFFBM</b> PERFORATED BASE PLATE FOR BAIN-MARIE WELL			
	<b>TRA12</b> BRIDGE SUPPORT FOR CONTAINERS GN 1/2	2,5X32X2,5		
	<b>TRA16</b> BRIDGE SUPPORT FOR CONTAINERS GN 1/6	2,5X17X2,5		
	<b>TRA11</b> BRIDGE SUPPORT FOR CONTAINERS GN 1/1	2,5X54X2,5		
	<b>BGN11</b> 1/1 GN FOOD CONTAINER WITH LID AND HANDLES	32,5X53X15		
	<b>BGN12</b> 1/2 GN FOOD CONTAINER WITH LID AND HANDLES	32,5X26,5X15		

## ACCESSORIES

GAMMA  
700 mmICON9000  
920 mm

MOD.	DESCRIPTION	cm	kW	kW
 <b>BGN13</b>	1/3 GN FOOD CONTAINER WITH LID AND HANDLES	32,5X17,7X15		
 <b>BGN16</b>	1/6 GN FOOD CONTAINER WITH LID AND HANDLES	16,2X17,7X15		
 <b>BGN23</b>	2/3 GN FOOD CONTAINER WITH LID AND HANDLES	32,5X35,4X15		
 <b>B11F2</b>	1/1 GN STAINLESS STEEL CONTAINER, H 20 MM	53X32,5X2		
 <b>B11F4</b>	1/1 GN STAINLESS STEEL CONTAINER, H 40 MM	53X32,5X4		
 <b>B11F6</b>	1/1 GN STAINLESS STEEL CONTAINER, H 65 MM	53X32,5X6,5		
 <b>NCEAM</b>	WATER FILLING TAP			

# ICON9000 MODULAR COOKING 2MM

## AIR BLADE HANDRAILS

CHEF COMFORT PRO. Chef Comfort Pro system applied to a cooking block gives added comfort and improves working conditions for the Chef. It reduces heat and effectively directs cooking fumes towards the hood. To fit the air blade system in a cooking block, it is necessary to insert the 20

cm motorized element to which the special handrails might be connected, placing them either on the left or on the right, for a maximum of 160 cm width. Scheme for composition examples of Chef Comfort Pro are in the introductory section to the chapter. The handrail has holes, from which air overflows; also,

the air flow is directional thanks to the swing of the handrail.

MOD.	DESCRIPTION	cm	kW	kW
	<b>20N1TLA</b> ENGINED ELEMENT FOR AIR BLADE HANDRAIL SYSTEM	20X92X75	0,2	230V 1N~/50Hz ÷ 60Hz
	<b>20N1TN</b> NEUTRAL ELEMENT	20X92X75		
<b>ACCESSORIES</b>				
MOD.	DESCRIPTION	cm	kW	kW
	<b>04NCFAD</b> AIR BLADE HANDRAIL FOR A FRONT SIDE - 40 CM DX	40X6,9X4		
	<b>08NCFAD</b> AIR BLADE HANDRAIL FOR A FRONT SIDE - 80 CM DX	80X6,9X4		
	<b>12NCFAD</b> AIR BLADE HANDRAIL FOR A FRONT SIDE - 120 CM DX	120X6,9X4		
	<b>16NCFAD</b> AIR BLADE HANDRAIL FOR A FRONT SIDE - 160 CM DX	160X6,9X4		
	<b>04NCFAS</b> AIR BLADE HANDRAIL FOR A FRONT SIDE - 40 CM SX	40X6,9X4		
	<b>08NCFAS</b> AIR BLADE HANDRAIL FOR A FRONT SIDE - 80 CM SX	80X6,9X4		
	<b>12NCFAS</b> AIR BLADE HANDRAIL FOR A FRONT SIDE - 120 CM SX	120X6,9X4		
	<b>16NCFAS</b> AIR BLADE HANDRAIL FOR A FRONT SIDE - 160 CM SX	160X6,9X4		

# ICON9000 MODULAR COOKING 2MM

## NEUTRAL AND COMPLEMENTARY ELEMENTS

Complementary elements made of AISI 304 stainless steel: neutral elements with or without water column, with or without drawers, element with integrated salamander support, elements with retractable spray gun or with sockets, sink.

MOD.	DESCRIPTION	 cm	 kW	 kW
 20NOTN	NEUTRAL ELEMENT	20X92X25		
 ONOTN	NEUTRAL ELEMENT	40X92X25		
 1N0TN	NEUTRAL ELEMENT	80X92X25		
 ON0TNCL	NEUTRAL ELEMENT WITH WATER FILLING TAP	40X92X25		
 ON0TC1	NEUTRAL ELEMENT WITH DRAWER/FRAME	40X92X25		
 1N0TC2	NEUTRAL ELEMENT WITH TWO DRAWERS/FRAMES	80X92X25		
 ON0TNRG	NEUTRAL ELEMENT ARRANGED FOR SALAMANDER SUPPORT	40X92X25		
 1N0TNRG	NEUTRAL ELEMENT WITH SALAMANDER SUPPORT	80X92X25		
 20N1TND	NEUTRAL ELEMENT WITH RETRACTABLE SPRAY GUN	20X92X75		

MOD.	DESCRIPTION	cm	kW	kW
------	-------------	----	----	----



**20N1TN** NEUTRAL ELEMENT 20X92X75



**0N1TC1P** ELEMENT WITH ELECTRIC SOCKETS 40X92X75



**0N1L** SINK ON CABINET 40X92X75

#### ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW
------	-------------	----	----	----



**BGN11P10** 1/1 GN POLYCARBONATE FOOD CONTAINER H= 100



**CEMTV** HOT/COLD WATER MIXER TAP



**CEGTV** HOT/COLD WATER MIXER TAP ELBOW OPERATED



**NCEA** WATER FILLING TAP

# ICON9000 MODULAR COOKING 2MM REFRIGERATED UNDER COMPARTMENTS

Refrigerated under compartment with external structure made of AISI 304 stainless steel and internal drawer made of ABS material, capacity 4xGN 1/1, h= 100 mm. Operating temperature: -22°/+15°C. Model 2NIBBC with blast chilling function. Refrigerant gas R600A. Energy class B (only if used in

positive temperature: A). Installation restrictions: allowed matching with all electric products (except for ONOBM1E-1NOBM2E), with gas appliances allowed matchng only with: 2N0FT1G-2N0FT7G-2N0GRG.

## ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	
	<b>2NIBNC</b> REFRIGERATED UNDER COMPARTMENT	120X80X50	0,28	230V 1N~ / 50HZ	
	<b>2NIBBC</b> REFRIGERATED UNDER COMPARTMENT - BLAST CHILLER	120X80X50	0,32	230V 1N~ / 50HZ	

ICON9000  
920 mm

GAMMA  
700 mm

# ICON9000 MODULAR COOKING 2MM

## UNDER COMPARTMENTS

Free-standing structure to support work-top units made of AISI 304 stainless steel. Made of AISI 304 stainless steel. Bottomless drawers on telescopic runners useful to GN 1/1 GN containers h. max 100 mm. It is not possible to install 1NIVBR under the following elements: induction and

infrared pyroceram appliances, electric chargrills and electric plates.

### ACCESSORIES

	MOD.	DESCRIPTION	cm	kW	kW	
	0NITG	UNDER COMPARTMENT - OPEN VERSION	40X80X50			
	1NITG	UNDER COMPARTMENT - OPEN VERSION	80X80X50			
	2NITG	UNDER COMPARTMENT - OPEN VERSION	120X80X50			
	0NITB	UNDER COMPARTMENT WITH RIGHT DOOR	40X85X50			
	1NITB	UNDER COMPARTMENT WITH TWO DOORS	80X85X50			
	0NIVC2	UNDER COMPARTMENT WITH TWO DRAWERS/FRAMES	40X85X50			
	1NIVBR	HEATED UNDER COMPARTMENT WITH DOORS	80X85X50	2	230V 1N~ / 50HZ	
	PBND	HINGED DOOR - OPENING ON THE RIGHT				
	PBNS	HINGED DOOR - OPENING ON THE LEFT				
	TPV	CONTAINER RACK - 1/1 GN	34,8X45,5X32,6			
	BGN11P10	1/1 GN POLYCARBONATE FOOD CONTAINER H= 100				

# ICON9000 MODULAR COOKING 2MM

## ACCESSORIES

Plinth: on 3 sides, made of AISI 304 stainless steel plinth. To be fixed to the feet of the appliances with clips. Plinth can be easily removed for periodic inspections These plinths can be fitted only on natural gas cooking multi-elements blocks. It is not suitable for LPG products. Handrail: made of

tubular AISI 304 stainless steel, Ø 40 mm. Extension works: made of AISI 304 stainless steel, 15/10 mm thickness, flat shape with satin finish. To be fixed to worktops. Used as handrail and support surface for pans and trays.

## ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW
 <b>OKPT</b>	FEET SET FOR TOP ELEMENT - 40 CM			
 <b>1KPT</b>	FEET SET FOR TOP ELEMENT - 80 CM			
 <b>2KPT</b>	FEET SET FOR TOP ELEMENT - 120 CM	120X20X10		
 <b>KPN</b>	4 FEET SET - FLOOR INSTALLATION			
 <b>NCLT</b>	SIDE PANELS	79X92X6		
 <b>NCLTL</b>	SIDE PANELS	79X92X0,4		
 <b>NCLTLB</b>	SIDE PANELS FOR BRATT PAN WITH TILTING WELL			
 <b>04NTR</b>	TROLLEY SUPPORT FOR 40 CM ELEMENT	40X75X15		
 <b>08NTR</b>	TROLLEY SUPPORT FOR 80 CM ELEMENT	80X75X15		
 <b>10NTR</b>	TROLLEY SUPPORT FOR 100 CM ELEMENT	100X75X15		
 <b>12NTR</b>	TROLLEY SUPPORT FOR 120 CM ELEMENT	120X75X15		
 <b>12NZC</b>	PLINTH ON 3 SIDES - FOR 120 CM BLOCK	120X80X15		
 <b>14NZC</b>	PLINTH ON 3 SIDES - FOR 140 CM BLOCK	140X80X15		
 <b>16NZC</b>	PLINTH ON 3 SIDES - FOR 160 CM BLOCK	160X80X15		

## ACCESSORIES

	MOD.	DESCRIPTION	 cm	 kW	 kW	
	18NZC	PLINTH ON 3 SIDES - FOR 180 CM BLOCK	180X80X15			
	20NZC	PLINTH ON 3 SIDES - FOR 200 CM BLOCK	200X80X15			
	22NZC	PLINTH ON 3 SIDES - FOR 220 CM BLOCK	220X80X15			
	24NZC	PLINTH ON 3 SIDES - FOR 240 CM BLOCK	240X80X15			
	26NZC	PLINTH ON 3 SIDES - FOR 260 CM BLOCK	260X80X15			
	28NZC	PLINTH ON 3 SIDES - FOR 280 CM BLOCK	280X80X15			
	NZC	SIDE PLINTH FOR BACK TO BACK BLOCK				
	NZCC	SIDE PLINTH FOR BACK TO BACK BLOCK WITH UPRIGHTS				
	04MF	SMOKE EXHAUST FLUE FOR 40 CM ELEMENT	40X20X10			
	08MF	SMOKE EXHAUST FLUE FOR 80 CM ELEMENT	80X20X10			
	04NCF	HANDRAIL FOR A FRONT SIDE 40 CM	40X6,9X4			
	08NCF	HANDRAIL FOR A FRONT SIDE 80 CM	80X6,9X4			
	12NCF	HANDRAIL FOR A FRONT SIDE 120 CM	120X6,9X4			
	14NCF	HANDRAIL FOR A FRONT SIDE 140 CM	140X6,9X4			
	16NCF	HANDRAIL FOR A FRONT SIDE 160 CM	160X6,9X4			
	04NPF	EXTENSION WORK SHELF - 40 CM	40X15,1X5,4			
	08NPF	EXTENSION WORK SHELF - 80 CM	80X15,1X5,4			

## ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	
—	<b>12NPF</b>	EXTENSION WORK SHELF - 120 CM	120X15,1X5,4		
	<b>16NPF</b>	EXTENSION WORK SHELF - 160 CM	160X15,1X5,4		

ICON9000  
920 mm  
GAMMA  
700 mm

# ICON9000 MODULAR COOKING 2MM

## BRIDGE INSTALLATION

The table with installation instructions is in the introductory section to the chapter.

### ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	
 04NPSS	CROSS BAR SUPPORT FOR 40 CM ELEMENT	40XOXO			
08NPSS	CROSS BAR SUPPORT FOR 80 CM ELEMENT	80XOXO			
12NPSS	CROSS BAR SUPPORT FOR 120 CM ELEMENT	120XOXO			
16NPSS	CROSS BAR SUPPORT FOR 160 CM ELEMENT	160XOXO			
 04NPRF	BOTTOM SHELF	40XOXO			
08NPRF	BOTTOM SHELF	80XOXO			
12NPRF	BOTTOM SHELF	120XOXO			
16NPRF	BOTTOM SHELF	160XOXO			

# ICON9000 MODULAR COOKING 2MM

## INSTALLATION ON MULTI-ELEMENTS SUPPORT

It is possible to install a cooking line on plinth made of stainless steel or masonry, by using a multi-elements support on which appliances are placed. The multi-element frame is made of AISI 304 stainless steel, 30/10 mm thickness, it ensures a good floor support with only 4/6 height-adjustable stainless

steel feet. Through the extensions it is possible to lengthen the width of the frame. The AISI 304 stainless steel extension, 30/10 mm thickness, is hitched on the multi-element support, thus enhancing the floor foothold of 2/4 height-adjustable stainless steel feet. The multi-element frame can be

equipped with a plinth made of AISI 304 stainless steel, closing the support on 3 sides. Plinth can be easily removed for periodic inspections These plinths can be fitted only on natural gas cooking multi-elements blocks. It is not suitable for LPG products.

### ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	
 <b>12NT4</b>	MULTI-ELEMENTS SUPPORT - 4 FEET - 120 CM	120X80X15			
 <b>16NT4</b>	MULTI-ELEMENTS SUPPORT - 4 FEET - 160 CM	160X80X15			
 <b>18NT4</b>	MULTI-ELEMENTS SUPPORT - 4 FEET - 180 CM	180X80X15			
 <b>20NT4</b>	MULTI-ELEMENTS SUPPORT - 4 FEET - 200 CM	200X80X15			
 <b>24NT4</b>	MULTI-ELEMENTS SUPPORT - 6 FEET - 240 CM	240X80X15			
 <b>04NT2E</b>	MULTI-ELEMENTS EXTENSION SUPPORT - 2 FEET - 40 CM	40X0X0			
 <b>06NT2E</b>	MULTI-ELEMENTS EXTENSION SUPPORT - 2 FEET - 60 CM	60X0X0			
 <b>08NT2E</b>	MULTI-ELEMENTS EXTENSION SUPPORT - 2 FEET - 80 CM	80X0X0			
 <b>10NT2E</b>	MULTI-ELEMENTS EXTENSION SUPPORT - 2 FEET - 100 CM	100X0X0			
 <b>12NT2E</b>	MULTI-ELEMENTS EXTENSION SUPPORT - 2 FEET - 120 CM	120X0X0			
 <b>14NT2E</b>	MULTI-ELEMENTS EXTENSION SUPPORT - 2 FEET - 140 CM	140X0X0			
 <b>16NT2E</b>	MULTI-ELEMENTS EXTENSION SUPPORT - 2 FEET - 160 CM	160X0X0			
<b>18NT2E</b>	MULTI-ELEMENTS EXTENSION SUPPORT - 2 FEET - 180 CM	180X0X0			
<b>20NT2E</b>	MULTI-ELEMENTS EXTENSION SUPPORT - 2 FEET - 200 CM	200X0X0			

## ACCESSORIES

MOD.	DESCRIPTION	 cm	 kW	 kW	 kW
12NZ	PLINTH ON 3 SIDES - FOR 120 CM BLOCK	120X86X15			
16NZ	PLINTH ON 3 SIDES - FOR 160 CM BLOCK	160X86X15			
18NZ	PLINTH ON 3 SIDES - FOR 180 CM BLOCK	180X86X15			
20NZ	PLINTH ON 3 SIDES - FOR 200 CM BLOCK	200X86X15			
22NZ	PLINTH ON 3 SIDES - FOR 220 CM BLOCK	220X86X15			
24NZ	PLINTH ON 3 SIDES - FOR 240 CM BLOCK	240X86X15			
26NZ	PLINTH ON 3 SIDES - FOR 260 CM BLOCK	260X86X15			
28NZ	PLINTH ON 3 SIDES - FOR 280 CM BLOCK	280X86X15			
30NZ	PLINTH ON 3 SIDES - FOR 300 CM BLOCK	300X86X15			
32NZ	PLINTH ON 3 SIDES - FOR 320 CM BLOCK	320X86X15			
34NZ	PLINTH ON 3 SIDES - FOR 340 CM BLOCK	340X86X15			
36NZ	PLINTH ON 3 SIDES - FOR 360 CM BLOCK	360X86X15			
38NZ	PLINTH ON 3 SIDES - FOR 380 CM BLOCK	380X86X15			
40NZ	PLINTH ON 3 SIDES - FOR 400 CM BLOCK	400X86X15			
42NZ	PLINTH ON 3 SIDES - FOR 420 CM BLOCK	420X86X15			
44NZ	PLINTH ON 3 SIDES - FOR 440 CM BLOCK	440X86X15			
46NZ	PLINTH ON 3 SIDES - FOR 460 CM BLOCK	460X86X15			

## ACCESSORIES

GAMMA  
700 mmICON9000  
920 mm

MOD.	DESCRIPTION	cm	kW	kW
48NZ	PLINTH ON 3 SIDES - FOR 480 CM BLOCK	480X86X15		
50NZ	PLINTH ON 3 SIDES - FOR 500 CM BLOCK	500X86X15		
52NZ	PLINTH ON 3 SIDES - FOR 520 CM BLOCK	520X86X15		
54NZ	PLINTH ON 3 SIDES - FOR 540 CM BLOCK	540X86X15		
185NZ	SIDE PLINTHS FOR BACK TO BACK BLOCK			
185NZC	SIDE PLINTH FOR BACK TO BACK BLOCK WITH EQUIPPED UPRIGHTS			

# ICON9000 MODULAR COOKING 2MM

## INSTALLATIONS ON BEAM

Installation suspended on a beam for one or two-sided customised layouts with no structural constraints and absolute flexibility, both top units and units with underneath cupboard/oven being inserted with great flexibility in the various models. The supporting beam has inside the positioning of all

necessary equipment for power/water/etc. supply. Cantilever support in tubular Fe360 heavy thickness welded steel structure with anticorrosion epoxy paint finish. Complete with pair of support feet, side covers and top cover in AISI 304 stainless steel, satin finish.

### ACCESSORIES

	MOD.	DESCRIPTION	cm	kW	kW	
	20NSTSM	SINGLE-FRONT CANTILEVER SUPPORT 200 CM	200X84X97			
	24NSTSM	SINGLE-FRONT CANTILEVER SUPPORT 240 CM	240X84X97			
	28NSTSM	SINGLE-FRONT CANTILEVER SUPPORT 280 CM	280X84X97			
	32NSTSM	SINGLE-FRONT CANTILEVER SUPPORT 320 CM	320X84X97			
	36NSTSM	SINGLE-FRONT CANTILEVER SUPPORT 360 CM	360X84X97			
	40NSTSM	SINGLE-FRONT CANTILEVER SUPPORT 400 CM	400X84X97			
	24NTSME	EXTENSION TO SINGLE FRONT CANTILEVER SUPPORT - 240 CM				
	20NSTB	DOUBLE-FRONT CANTILEVER SUPPORT 200 CM	200X139X97			
	24NSTB	DOUBLE-FRONT CANTILEVER SUPPORT 240 CM	240X139X97			
	28NSTB	DOUBLE-FRONT CANTILEVER SUPPORT 280 CM	280X139X97			
	32NSTB	DOUBLE-FRONT CANTILEVER SUPPORT 320 CM	320X139X97			
	36NSTB	DOUBLE-FRONT CANTILEVER SUPPORT 360 CM	360X139X97			
	40NSTB	DOUBLE-FRONT CANTILEVER SUPPORT 400 CM	400X139X97			
	24NTSBE	EXTENSION TO DOUBLE FRONT CANTILEVER SUPPORT - 240 CM				

## ACCESSORIES

GAMMA  
700 mm

MOD.	DESCRIPTION	cm	kW	kW
------	-------------	----	----	----

	<b>02NSAT</b>	HOOK TO CANTILEVER SUPPORT FOR 20 CM ELEMENTS	20X16X76	
	<b>04NSAT</b>	HOOK TO CANTILEVER SUPPORT FOR 40 CM ELEMENTS	40X16X76	
	<b>08NSAT</b>	HOOK TO CANTILEVER SUPPORT FOR 80 CM ELEMENTS	80X16X76	
	<b>10NSAT</b>	HOOK TO CANTILEVER SUPPORT FOR 100 CM ELEMENTS	100X16X76	
	<b>12NSAT</b>	HOOK TO CANTILEVER SUPPORT FOR 120 CM ELEMENTS	120X16X76	
	<b>SNTOP</b>	SUPPORTS FOR TOP ELEMENTS ON CANTILEVER BEAM	92X4X25	
	<b>20NSCRM</b>	BACK PANNELLING 200 CM	200X80X68	
	<b>24NSCRM</b>	BACK PANNELLING 240 CM	240X80X68	
	<b>28NSCRM</b>	BACK PANNELLING 280 CM	280X80X68	
	<b>32NSCRM</b>	BACK PANNELLING 320 CM	320X80X68	
	<b>36NSCRM</b>	BACK PANNELLING 360 CM	360X80X68	
	<b>40NSCRM</b>	BACK PANNELLING 400 CM	400X80X68	
	<b>04NSCTT</b>	BOTTOM PANEL FOR 40 CM TOP ELEMENTS	40X84X50	
	<b>08NSCTT</b>	BOTTOM PANEL FOR 80 CM TOP ELEMENTS	80X84X50	
	<b>12NSCTT</b>	BOTTOM PANEL FOR 120 CM TOP ELEMENTS	120X84X50	
	<b>NSCLD</b>	SIDE PANEL - RIGHT VERSION	0,4X92X79	
	<b>NSCLS</b>	SIDE PANEL - LEFT VERSION	0,4X92X79	

ICON9000  
920 mm

## ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	Ø
NSCLTD	SIDE PANEL - RIGHT VERSION FOR TOP ELEMENT	0,4X92X79			
NSCLTS	SIDE PANEL - LEFT VERSION FOR TOP ELEMENT	0,4X92X79			
NSCLBD	SIDE PANEL - RIGHT VERSION FOR BRATT PAN WITH TILTING WELL	0,4X13X79			
NSCLBS	SIDE PANEL - LEFT VERSION FOR BRATT PAN WITH TILTING WELL	0,4X13X79			

# ICON9000 MODULAR COOKING 2MM

## EQUIPPED UPRIGHTS

Uprights: welded tubular AISI 304 stainless steel structure, section 50x30 mm, 2 mm thick, cover made of AISI 304 stainless steel plate, satin finish, 0.8 mm thick. They are pre-arranged for fixing to floor by plugs and appliance fixing by means of screws. Uprights include a shelf on the upper level (made

of AISI 304 stainless steel). To choose the accessories of the uprights see the introductory section to the chapter. At the upper level, between uprights, it is possible to install a pan-support connecting grid. The compatibility of the accessories at the lower level depends on the underlying functional elements. If

the lower level has no accessory, upright must be compulsorily completed with cover CCIA-CCIB.

### ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	
 CMG04	SINGLE FRONT UPRIGHT - 1 GRID 40 CM	40X46X182			
 CMG08	SINGLE FRONT UPRIGHT - 1 GRID 80 CM	80X46X182			
 CMR04	SINGLE FRONT UPRIGHT - 1 SHELF 40 CM	40X46X182			
 CMR08	SINGLE FRONT UPRIGHT - 1 SHELF 80 CM	80X46X182			
 CML08	SINGLE FRONT UPRIGHT - 1 SHELF WITH LIGHTING 80 CM	80X46X182	0,007	230V 1N~/50 ÷ 60HZ	
 CBGG04	DOUBLE FRONT UPRIGHT - 2 GRIDS 40 CM	40X86X182			
 CBGG08	DOUBLE FRONT UPRIGHT - 2 GRIDS 80 CM	80X86X182			
 CBRR04	DOUBLE FRONT UPRIGHT - 2 SHELVES 40 CM	40X86X182			
 CBRR08	DOUBLE FRONT UPRIGHT - 2 SHELVES 80 CM	80X86X182			
 CBGR04	DOUBLE FRONT UPRIGHT - 1 GRID 1 SHELF 40 CM	40X86X182			
 CBGR08	DOUBLE FRONT UPRIGHT - 1 GRID 1 SHELF 80 CM	80X86X182			
 CBLL08	DOUBLE FRONT UPRIGHT - 2 SHELVES WITH LIGHTING 80 CM	80X86X182	0,014	230V 1N~/50 ÷ 60HZ	
 CBGL08	DOUBLE FRONT UPRIGHT 1 GRID 1 SHELF WITH LIGHTING 80 CM	80X86X182	0,007	230V 1N~/50 ÷ 60HZ	
 CBRL08	DOUBLE FRONT UPRIGHT 1 GRID 1 SHELF WITH LIGHTING 80 CM	80X86X182	0,007	230V 1N~/50 ÷ 60HZ	

## ACCESSORIES

	MOD.	DESCRIPTION	 cm	 kW	 kW	
	GP04	PAN SUPPORT CONNECTING REST 40 CM	40X40X5			
	GP06	PAN SUPPORT CONNECTING REST 60 CM	60X40X5			
	GP08	PAN SUPPORT CONNECTING REST 80 CM	80X40X5			
	GP10	PAN SUPPORT CONNECTING REST 100 CM	100X40X5			
	GP12	PAN SUPPORT CONNECTING REST 120 CM	120X40X5			
	GP14	PAN SUPPORT CONNECTING REST 140 CM	140X40X5			
	GP16	PAN SUPPORT CONNECTING REST 160 CM	160X40X5			
	GP18	PAN SUPPORT CONNECTING REST 180 CM	180X40X5			
	GP20	PAN SUPPORT CONNECTING REST 200 CM	200X40X5			
	R04IA	SHELF FOR UPRIGHT SIDE A CM 40	40X25X5			
	R04IB	SHELF FOR UPRIGHT SIDE B CM 40	40X25X5			
	R08IA	SHELF FOR UPRIGHT SIDE A CM 80	80X25X5			
	R08IB	SHELF FOR UPRIGHT SIDE B CM 80	80X25X5			
	G08IA	GRID SHELF FOR UPRIGHT SIDE A CM 80	80X25X5			
	G08IB	GRID SHELF FOR UPRIGHT SIDE B CM 80	80X25X5			
	TGNIA	CONTAINER SUPPORT FOR UPRIGHT SIDE A	74X36X5			
	TGNIB	CONTAINER SUPPORT FOR UPRIGHT SIDE B	74X36X5			

## ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW
CRAIA	ARTICULATED TAP SIDE A			
CRAIB	ARTICULATED TAP SIDE B			
RBE208IA	SHELF WITH SOCKETS BOX SIDE A CM 80	80X25X34	230V 1N~/50 ÷ 60HZ	
RBE208IB	SHELF WITH SOCKETS BOX SIDE B CM 80	80X25X34	230V 1N~/50 ÷ 60HZ	
PE1IA	SOCKET SIDE A		230V 1N~/50 ÷ 60HZ	
PE1IB	SOCKET SIDE B		230V 1N~/50 ÷ 60HZ	
RPE104IA	SHELF WITH SOCKET SIDE A CM 80	40X25X5	230V 1N~/50 ÷ 60HZ	
RPE104IB	SHELF WITH SOCKET SIDE B CM 80	40X25X5	230V 1N~/50 ÷ 60HZ	
RPE108IA	SHELF WITH SOCKET SIDE A CM 80	80X25X5	230V 1N~/50 ÷ 60HZ	
RPE108IB	SHELF WITH SOCKET SIDE B CM 80	80X25X5	230V 1N~/50 ÷ 60HZ	
CCIA	UPRIGHT COVER SIDE A			
CCIB	UPRIGHT COVER SIDE B			
TI08	UPPER MIDDLE CLOSING SECTION			
TI10	UPPER MIDDLE CLOSING SECTION			
TI12	UPPER MIDDLE CLOSING SECTION			
TI14	UPPER MIDDLE CLOSING SECTION			
TI16	UPPER MIDDLE CLOSING SECTION			

ICON9000  
920 mm  
GAMMA  
700 mm

## ACCESSORIES

MOD.	DESCRIPTION	cm	kW	kW	kg
TI18	UPPER MIDDLE CLOSING SECTION				
TI20	UPPER MIDDLE CLOSING SECTION				
TI22	UPPER MIDDLE CLOSING SECTION				
TI24	UPPER MIDDLE CLOSING SECTION				
TI26	UPPER MIDDLE CLOSING SECTION				
TI28	UPPER MIDDLE CLOSING SECTION				
TI30	UPPER MIDDLE CLOSING SECTION				
TLE02	UPPER SIDE CLOSING SECTION FOR 2 BACK TO BACK COOKING BLOCKS				
TLE04	UPPER SIDE CLOSING SECTION FOR 2 BACK TO BACK COOKING BLOCKS				
TLE02M	UPPER SIDE CLOSING SECTION FOR ONE SIDED COOKING BLOCK				
TLE04M	UPPER SIDE CLOSING SECTION FOR ONE SIDED COOKING BLOCK				